


OMNIMATE Signal - series LMZF LMZF 5/12/135 3.5OR

Weidmüller Interface GmbH & Co. KG
 Klingenbergstraße 16
 D-32758 Detmold
 Germany
 Fon: +49 5231 14-0
 Fax: +49 5231 14-292083
 www.weidmueller.com

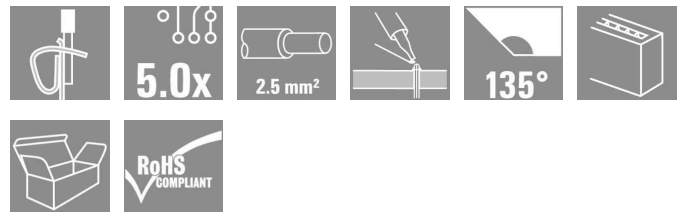

The compact installation terminal for the standard wire cross-section size of 2.5mm².
 Tension clamp connection with a 135° outlet direction, in variable pitch: 5.00 - 5.08 mm (1 part with 2 pitches).

Rated data:

- 24A at 40°C / 630V (IEC) or 15A / 300V (UL)
- 0.13 - 2.5 mm² (IEC) / 26 - 14 AWG (UL)
- Flammability class according to UL 94: V0

Application benefits:

- Safe: ATEX certification Ex II 2GD / Ex e II (KEMA07 ATAEX0047U) optional
- Temperature resistant: long-term resistance up to 120°C provided by high-performance Wemid insulation material
- Adaptable: simple pitch adaptation from 5.00 to 5.08 mm (0.200 inch)
- Convenient: optional lever for simple opening of terminal point

General ordering data

| | |
|--------------|---|
| Type | LMZF 5/12/135 3.5OR |
| Order No. | 1914090000 |
| Version | PCB terminal, 5.00 mm, No. of poles: 12, 135°, Solder pin length (l): 3.5 mm, tinned, Orange, Tension clamp connection, Clamping range, rated connection, max.: 2.5 mm ² , Box |
| GTIN (EAN) | 4032248544653 |
| Qty. | 100 pc(s). |
| Product data | IEC: 630 V / 24 A / 0.13 - 2.5 mm ² UL: 300 V / 15 A / AWG 26 - AWG 14 |
| Packaging | Box |

OMNIMATE Signal - series LMZF LMZF 5/12/135 3.5OR

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 16
D-32758 Detmold
Germany
Fon: +49 5231 14-0
Fax: +49 5231 14-292083
www.weidmueller.com

Technische Daten

Dimensions and weights

Net weight 13.17 g

System characteristics

| | | | |
|--|-------------------------------|--|--------------------------|
| Product family | OMNIMATE Signal - series LMZF | Wire connection method | Tension clamp connection |
| Mounting onto the PCB | Solder connection | Conductor outlet direction | 135° |
| Pitch in mm (P) | 5 mm | Pitch in inches (P) | 0.197 inch |
| No. of poles | 12 | Fitted by customer | No |
| Max. adjacent poles per row | 48 | Solder pin length (l) | 3.5 mm |
| Solder eyelet hole diameter (D) | 1.3 mm | Solder eyelet hole diameter tolerance (D) | + 0,1 mm |
| Number of solder pins per pole | 2 | Screwdriver blade | 0.4 x 2.5 |
| Screwdriver blade standard | DIN 5264-A | Stripping length | 6 mm |
| L1 in mm | 55 mm | L1 in inches | 2.165 inch |
| Touch-safe protection acc. to DIN VDE 0470 | IP 20 | Touch-safe protection acc. to DIN VDE 57 106 | Safe from finger touch |

Material data

| | | | |
|---------------------------|------------|-----------------|--------|
| Insulating material | Wemid (PA) | Colour | Orange |
| UL 94 flammability rating | V-0 | CTI | ≥ 600 |
| Contact material | E-Cu | Contact surface | tinned |
| Contact base material | E-Cu | | |

Connectable conductors

| | | | |
|---|----------------------|---|---------------------|
| Clamping range, rated connection, min. | 0.13 mm ² | Clamping range, rated connection, max. | 2.5 mm ² |
| Wire connection cross section AWG, min. | AWG 26 | Wire connection cross section AWG, max. | AWG 14 |
| Solid, min. H05(07) V-U | 0.13 mm ² | Solid, max. H05(07) V-U | 2.5 mm ² |
| Flexible, min. H05(07) V-K | 0.13 mm ² | Flexible, max. H05(07) V-K | 2.5 mm ² |
| w. wire end ferrule, DIN 46228 pt 1, min. | 0.25 mm ² | w. wire end ferrule, DIN 46228 pt 1, max. | 1.5 mm ² |
| w. plastic collar ferrule, DIN 46228 pt 4, min. | 0.25 mm ² | w. plastic collar ferrule, DIN 46228 pt 4, max. | 1.5 mm ² |

DIN IEC rating data

| | | | |
|--|-------|--|-------|
| Rated current, min. no. of poles (Tu=20°C) | 24 A | Rated current, max. no. of poles (Tu=20°C) | 24 A |
| Rated current, number of poles (Tu=40°C), min | 24 A | Rated current, number of poles (Tu=40°C), max. | 24 A |
| Rated voltage for surge voltage class pollution degree II/2 | 630 V | Rated voltage for surge voltage class pollution degree III/2 | 320 V |
| Rated voltage for surge voltage class pollution degree III/3 | 250 V | Rated impulse voltage for surge voltage class pollution degree II/2 | 4 kV |
| Rated impulse voltage for surge voltage class pollution degree III/2 | 4 kV | Rated impulse voltage for surge voltage class contamination degree III/3 | 4 kV |

**OMNIMATE Signal - series LMZF
LMZF 5/12/135 3.5OR**

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 16
D-32758 Detmold
Germany
Fon: +49 5231 14-0
Fax: +49 5231 14-292083
www.weidmueller.com

Technische Daten

CSA rating data

Institute (CSA)



Rated voltage (Use group B)

300 V

| | |
|-------------------------------|--------|
| Rated current (use group B) | 20 A |
| Rated current (use group D) | 10 A |
| Wire cross-section, AWG, max. | AWG 14 |

| | |
|-------------------------------|--------|
| Rated voltage (use group D) | 300 V |
| Wire cross-section, AWG, min. | AWG 26 |

UL 1059 rating data

| | |
|-------------------------------|--------|
| Rated voltage (use group B) | 300 V |
| Rated voltage (use group D) | 300 V |
| Wire cross-section, AWG, min. | AWG 26 |

| | |
|-------------------------------|--------|
| Rated current (use group B) | 15 A |
| Rated current (use group D) | 10 A |
| Wire cross-section, AWG, max. | AWG 14 |

Classifications

| | | | |
|------------|-------------|------------|-------------|
| ETIM 3.0 | EC001284 | UNSPSC | 30-21-18-11 |
| eClass 5.1 | 27-26-11-01 | eClass 6.2 | 27-26-11-01 |
| eClass 7.1 | 27-44-04-01 | | |

Notes

Notes

- Rated current related to rated cross-section & min. No. of poles.
- Wire end ferrule without plastic collar to DIN 46228/1
- Wire end ferrule with plastic collar to DIN 46228/4
- P on drawing = pitch
- Rated data refer only to the component itself. Clearance and creepage distances to other components are to be designed in accordance with the relevant application standards.

Approvals

Approvals




ROHS

Conform

OMNIMATE Signal - series LMZF
LMZF 5/12/135 3.5OR

Weidmüller Interface GmbH & Co. KG
 Klingenbergstraße 16
 D-32758 Detmold
 Germany
 Fon: +49 5231 14-0
 Fax: +49 5231 14-292083
 www.weidmueller.com

Zeichnungen

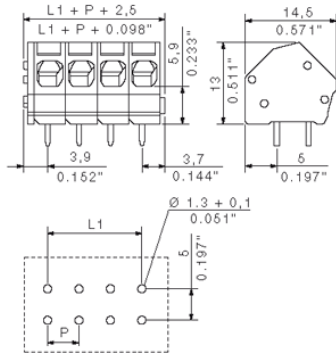

LMZF 5/.. /135

