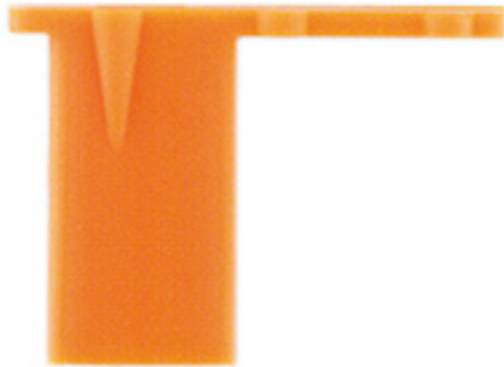


SAK Series, Accessories
SSP 3 SAKT1**Weidmüller Interface GmbH & Co. KG**
Klingenbergstraße 16
D-32758 Detmold
Germany
Fon: +49 5231 14-0
Fax: +49 5231 14-292083
www.weidmueller.com

The versatile and extensive range of products - from 0.05 mm² to 300 mm² - means that you have diverse options for your applications at your disposal. Hardened steel for mechanical strength and high-quality tinned copper for optimum conductivity. All materials comply with RoHS requirements and have been tested to current environment guidelines.

General ordering data

Type	SSP 3 SAKT1
Order No.	0531760000
Version	SAK Series, Accessories, Lockout device
GTIN (EAN)	4008190130787
Qty.	100 pc(s).

**SAK Series, Accessories
SSP 3 SAKT1**

Weidmüller Interface GmbH & Co. KG
 Klingenbergstraße 16
 D-32758 Detmold
 Germany
 Fon: +49 5231 14-0
 Fax: +49 5231 14-292083
 www.weidmueller.com

Technische Daten

Dimensions and weights

Net weight 0.337 g

Temperatures

Operating temperature		Storage temperature	
Continuous operating temp., min.	-50 °C	Continuous operating temp., max.	100 °C

Additional technical data

Explosion-tested version	No	Installation advice	Direct mounting
Version	Miscellaneous		

Material data

Colour Orange

System specifications

Product family SAK Series, Accessories

Classifications

ETIM 3.0	EC000897	UNSPSC	30-21-18-11
eClass 5.1	27-14-11-45	eClass 6.2	27-14-92-14
eClass 7.1	27-14-92-14		

Approvals

Approvals



ROHS Conform