


**W-terminal with external tensioning
WDU 4 SL/EN**

Weidmüller Interface GmbH & Co. KG
 Klingenbergstraße 16
 D-32758 Detmold
 Germany
 Fon: +49 5231 14-0
 Fax: +49 5231 14-292083
 www.weidmueller.com

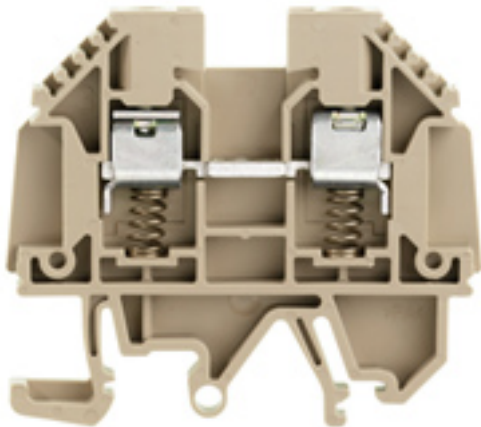

At Weidmüller, new solutions for the energy sector are developed according to local or application-based installation requirements. In some countries, control and protection of switching installations for transmission and distribution networks must comply with the EA-TS 50-18 standard. The standard prescribes "spring-loaded" terminals in conjunction with hook-blade cable lugs in order to ensure additional safety. The Weidmüller "spring-loaded" terminals of the WDU SL series and the disconnect terminals of the WTL SL series comply with this standard. In the SL versions, the clamping yoke is backed up by a helical spring. Furthermore, this arrangement permits two conductors to be connected to one terminal when the hook-blade cable lugs are placed back to back. The aim of this arrangement is to ensure good electrical contact even if someone forgets to tighten the clamping screw!

General ordering data

Type	WDU 4 SL/EN
Order No.	9537450000
Version	W-terminal with external tensioning, Feed-through terminal, Rated cross-section: 4 mm², Screw connection
GTIN (EAN)	4032248037452
Qty.	50 pc(s).

W-terminal with external tensioning WDU 4 SL/EN

Weidmüller Interface GmbH & Co. KG
 Klingenbergstraße 16
 D-32758 Detmold
 Germany
 Fon: +49 5231 14-0
 Fax: +49 5231 14-292083
 www.weidmueller.com

Technische Daten

Dimensions and weights

Length	60 mm	Width	6.1 mm
Height	51.5 mm	Height of lowest version	53.5 mm
Weight	12.32 g	Net weight	12.512 g

Temperatures

Operating temperature		Storage temperature	
Continuous operating temp., min.	-50 °C	Continuous operating temp., max.	120 °C

Rated data IECEx/ATEX

Certificate No. (ATEX)	SIRA02ATEX3242U	ATEX certificate	
ATEX certificate	SIRA02ATEX3242U_e.pdf	Certificate No. (IECEX)	IECEXSIR05.0040U
IEC Ex certificate	IECEXSIR05.0040U_e.pdf	Max. voltage (ATEX)	275 V
Current (ATEX)	28 A	Wire cross section max. (ATEX)	4 mm ²
Voltage, cross-connection		Operating temperature range	For operating temperature range see EC Design Test Certificate / IEC Ex-Certificate of Conformity
	CrossConnectionGuide.pdf		
Marking EN 60079-7	Ex e II	Marking ATEX Directive 94/9/EC	II 2 G D

Additional technical data

Explosion-tested version	No	Number of similar terminals	1
Open sides	right	Type of mounting	Snap-on
Version	Screw connection, with spring-loaded cable clamp, for screwable cross-connection, for plug-in cross-connector, One end without connector		

CSA ratings data

Certificate No. (CSA)	200039-1057876	Voltage size C (CSA)	300 V
Voltage size D (CSA)	600 V	Current size C (CSA)	25 A
Current size D (CSA)	5 A	Wire cross section max. (CSA)	10 AWG
Wire cross section min. (CSA)	22 AWG		

Clampable wires (additional connection)

Conductor cross-section, flexible plus plastic collar DIN 46228/1, further connection, min.	0.5 mm ²	Conductor cross-section, flexible plus plastic collar DIN 46228/1, further connection, max.	4 mm ²
---	---------------------	---	-------------------

W-terminal with external tensioning WDU 4 SL/EN

Weidmüller Interface GmbH & Co. KG
 Klingenbergstraße 16
 D-32758 Detmold
 Germany
 Fon: +49 5231 14-0
 Fax: +49 5231 14-292083
 www.weidmueller.com

Technische Daten

Clampable wires (rated connection)

Type of connection	Screw connection	Stripping length	15 mm
Blade size	0.6 x 3.5 mm	Connection direction	on side
Number of connections	2	Clamping range, rated connection, min.	0.22 mm ²
Clamping range, rated connection, max.	6 mm ²	Clamping screw	M 3
Tightening torque, min.	0.5 Nm	Tightening torque, max.	1 Nm
Torque level with DMS electric screwdriver	2	Gauge to IEC 60947-1	A4
Wire connection cross section, solid core, max. rated connection	0.5 mm ²	Wire connection cross section, solid core max. rated connection	6 mm ²
Wire connection cross section, stranded, rated connection, min.	1.5 mm ²	Wire connection cross section, stranded, rated connection, max.	6 mm ²
Wire connection cross section, finely stranded, max.	4 mm ²	Wire connection cross-section, finely stranded, min.	0.5 mm ²
Wire connection cross section, finely stranded with wire-end ferrules DIN 46228/1, rated connection, min.	0.5 mm ²	Wire connection cross section, finely stranded with wire-end ferrules DIN 46228/1, rated connection, max.	4 mm ²
Wire connection cross section AWG, min.	AWG 26	Wire connection cross section AWG, max.	AWG 10

Rated data

Rated cross-section	4 mm ²	Rated voltage	500 V
Rated impulse withstand voltage	6 kV	Rated current	32 A
Current at maximum wires	41 A	Standards	IEC 60947-7-1
Pollution severity	3		

UL ratings data

Certificate No. (UR)	E60693	Voltage size C (UR)	600 V
Current size C (UR)	30 A	Conductor size Factory wiring max. (UR)	10 AWG
Conductor size Factory wiring min. (UR)	22 AWG	Conductor size Field wiring max. (UR)	10 AWG

Material data

Material	Wemid	Colour	Dark Beige
UL 94 flammability rating	V-0		

System specifications

Product family	W-terminal with external tensioning	Type of connection	Screw connection
Connection direction	on side	Number of levels	1
Number of connections	2	No. of clamping points per level	2
Levels cross-connected internally	No	Mounting rail	TS 32, TS 35
End cover plate required	Yes		

Classifications

ETIM 3.0	EC000897	UNSPSC	30-21-18-11
eClass 5.1	27-14-11-31	eClass 6.2	27-14-11-90
eClass 7.1	27-14-11-90		

Product information

Descriptive text ordering data	With pollution severity degree 2, the voltage can be raised to 630 V (no increased contamination can appear).
Descriptive text technical data	Note the max. current of the terminal (41 A) when using the cross-connector!

Erstellungs-Datum January 31, 2014 2:10:35 PM CET

Datenblatt

**W-terminal with external tensioning
WDU 4 SL/EN**

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 16
D-32758 Detmold
Germany
Fon: +49 5231 14-0
Fax: +49 5231 14-292083
www.weidmueller.com

Technische Daten

Approvals

Approvals



ROHS

Conform

Datenblatt

**W-terminal with external tensioning
WDU 4 SL/EN**

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 16
D-32758 Detmold
Germany
Fon: +49 5231 14-0
Fax: +49 5231 14-292083
www.weidmueller.com

Zeichnungen

