


## W-terminal with external tensioning WDU 6 SL/EN

**Weidmüller Interface GmbH & Co. KG**  
 Klingenbergstraße 16  
 D-32758 Detmold  
 Germany  
 Fon: +49 5231 14-0  
 Fax: +49 5231 14-292083  
 www.weidmueller.com

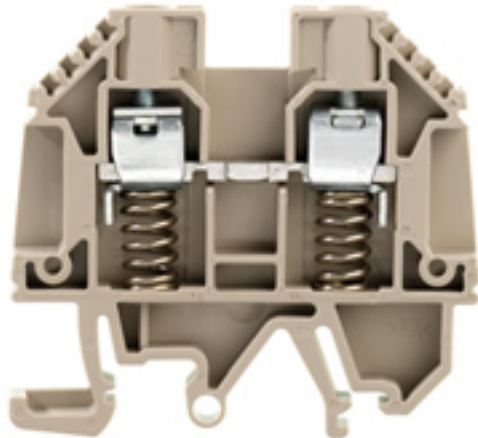

At Weidmüller, new solutions for the energy sector are developed according to local or application-based installation requirements.

In some countries, control and protection of switching installations for transmission and distribution networks must comply with the EA-TS 50-18 standard. The standard prescribes "spring-loaded" terminals in conjunction with hook-blade cable lugs in order to ensure additional safety. The Weidmüller "spring-loaded" terminals of the WDU SL series and the disconnect terminals of the WTL SL series comply with this standard. In the SL versions, the clamping yoke is backed up by a helical spring. Furthermore, this arrangement permits two conductors to be connected to one terminal when the hook-blade cable lugs are placed back to back. The aim of this arrangement is to ensure good electrical contact even if someone forgets to tighten the clamping screw!

### General ordering data

Type	WDU 6 SL/EN
Order No.	<a href="#">9537470000</a>
Version	W-terminal with external tensioning, Feed-through terminal, Rated cross-section: 6 mm <sup>2</sup> , Screw connection
GTIN (EAN)	4008190026097
Qty.	50 pc(s).

## W-terminal with external tensioning WDU 6 SL/EN

**Weidmüller Interface GmbH & Co. KG**  
 Klingenbergstraße 16  
 D-32758 Detmold  
 Germany  
 Fon: +49 5231 14-0  
 Fax: +49 5231 14-292083  
 www.weidmueller.com

## Technische Daten

### Dimensions and weights

Length	60 mm	Width	7.9 mm
Height	51.1 mm	Height of lowest version	53.5 mm
Weight	17.33 g	Net weight	18.66 g

### Temperatures

Operating temperature		Storage temperature	
Continuous operating temp., min.	-50 °C	Continuous operating temp., max.	120 °C

### Rated data IECEx/ATEX

Certificate No. (ATEX)	SIRA02ATEX3242U	ATEX certificate	
ATEX certificate	SIRA02ATEX3242U_e.pdf	Certificate No. (IECEX)	IECEXSIR05.0040U
IEC Ex certificate	IECEXSIR05.0040U_e.pdf	Max. voltage (ATEX)	275 V
Current (ATEX)	36 A	Wire cross section max. (ATEX)	6 mm <sup>2</sup>
Voltage, cross-connection		Operating temperature range	For operating temperature range see EC Design Test Certificate / IEC Ex-Certificate of Conformity
	CrossConnectionGuide.pdf		
Marking EN 60079-7	Ex e II	Marking ATEX Directive 94/9/EC	II 2 G D

### Additional technical data

Explosion-tested version	No	Number of similar terminals	1
Open sides	right	Type of mounting	Snap-on
Version	Screw connection, with spring-loaded cable clamp, for screwable cross-connection, for plug-in cross-connector, One end without connector		

### CSA ratings data

Certificate No. (CSA)	200039-1057876	Voltage size B (CSA)	300 V
Voltage size C (CSA)	300 V	Voltage size D (CSA)	600 V
Current size B (CSA)	45 A	Current size C (CSA)	45 A
Current size D (CSA)	5 A	Wire cross section max. (CSA)	8 AWG
Wire cross section min. (CSA)	20 AWG		

### Clampable wires (additional connection)

Conductor cross-section, flexible plus plastic collar DIN 46228/1, further connection, min.	0.5 mm <sup>2</sup>	Conductor cross-section, flexible plus plastic collar DIN 46228/1, further connection, max.	6 mm <sup>2</sup>
---	---------------------	---	-------------------

## W-terminal with external tensioning WDU 6 SL/EN

**Weidmüller Interface GmbH & Co. KG**  
Klingenbergstraße 16  
D-32758 Detmold  
Germany  
Fon: +49 5231 14-0  
Fax: +49 5231 14-292083  
www.weidmueller.com

## Technische Daten

### Clampable wires (rated connection)

Type of connection	Screw connection	Stripping length	16 mm
Blade size	0.8 x 4.0 mm	Connection direction	on side
Number of connections	2	Clamping range, rated connection, min.	0.5 mm <sup>2</sup>
Clamping range, rated connection, max.	10 mm <sup>2</sup>	Clamping screw	M 3.5
Tightening torque, min.	1 Nm	Gauge to IEC 60947-1	A5
Wire connection cross section, solid core, max. rated connection	0.5 mm <sup>2</sup>	Wire connection cross section, solid core max. rated connection	10 mm <sup>2</sup>
Wire connection cross section, stranded, rated connection, min.	1.5 mm <sup>2</sup>	Wire connection cross section, stranded, rated connection, max.	10 mm <sup>2</sup>
Wire connection cross section, finely stranded, max.	6 mm <sup>2</sup>	Wire connection cross-section, finely stranded, min.	0.5 mm <sup>2</sup>

### Rated data

Rated cross-section	6 mm <sup>2</sup>	Rated voltage	500 V
Rated impulse withstand voltage	6 kV	Rated current	41 A
Current at maximum wires	57 A	Standards	IEC 60947-7-1
Pollution severity	3	Surge voltage category	III

### UL ratings data

Certificate No. (UR)	E60693	Voltage size C (UR)	150 V
Voltage size D (UR)	300 V	Current size C (UR)	50 A
Current size D (UR)	10 A	Conductor size Factory wiring max. (UR)	8 AWG
Conductor size Factory wiring min. (UR)	20 AWG	Conductor size Field wiring max. (UR)	8 AWG

### Material data

Material	Wemid	Colour	Dark Beige
UL 94 flammability rating	V-0		

### System specifications

Product family	W-terminal with external tensioning	Type of connection	Screw connection
Connection direction	on side	Number of levels	1
Number of connections	2	No. of clamping points per level	2
Levels cross-connected internally	No	Mounting rail	TS 32, TS 35
End cover plate required	Yes		

### Classifications

ETIM 3.0	EC000897	UNSPSC	30-21-18-11
eClass 5.1	27-14-11-31	eClass 6.2	27-14-11-90
eClass 7.1	27-14-11-90		

### Product information

Descriptive text ordering data	With pollution severity degree 2, the voltage can be raised to 630 V (no increased contamination can appear).
Descriptive text technical data	ESI rated data: 500 V/24 A / Note the max. current of the terminal (57 A) when using the cross-connector!

**Datenblatt**

**W-terminal with external tensioning  
WDU 6 SL/EN**

**Weidmüller Interface GmbH & Co. KG**  
Klingenbergstraße 16  
D-32758 Detmold  
Germany  
Fon: +49 5231 14-0  
Fax: +49 5231 14-292083  
[www.weidmueller.com](http://www.weidmueller.com)

**Technische Daten**

**Approvals**

Approvals



ROHS

Conform

**Datenblatt**

**W-terminal with external tensioning  
WDU 6 SL/EN**

**Weidmüller Interface GmbH & Co. KG**  
Klingenbergstraße 16  
D-32758 Detmold  
Germany  
Fon: +49 5231 14-0  
Fax: +49 5231 14-292083  
[www.weidmueller.com](http://www.weidmueller.com)

**Zeichnungen**

