


**W-Series  
WDK 2.5 1D**

**Weidmüller Interface GmbH & Co. KG**  
Klingenbergstraße 16  
D-32758 Detmold  
Germany  
Fon: +49 5231 14-0  
Fax: +49 5231 14-292083  
www.weidmueller.com

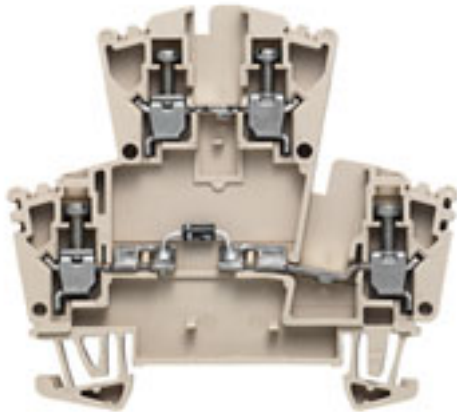

The versatile and extensive range of products - from 0.05 mm<sup>2</sup> to 300 mm<sup>2</sup> - means that you have diverse options for your applications at your disposal. Hardened steel for mechanical strength and high-quality tinned copper for optimum conductivity. All materials comply with RoHS requirements and have been tested to current environment guidelines.

**General ordering data**

Type	WDK 2.5 1D
Order No.	<a href="#">8025610000</a>
Version	W-Series, Component terminal, Rated cross-section: 2.5 mm <sup>2</sup> , Screw connection, Direct mounting
GTIN (EAN)	4008190150495
Qty.	25 pc(s).

## W-Series WDK 2.5 1D

**Weidmüller Interface GmbH & Co. KG**  
 Klingenbergstraße 16  
 D-32758 Detmold  
 Germany  
 Fon: +49 5231 14-0  
 Fax: +49 5231 14-292083  
 www.weidmueller.com

## Technische Daten

### Dimensions and weights

Length	69 mm	Width	5.1 mm
Height	62.5 mm	Height of lowest version	63 mm
Net weight	12.15 g		

### Temperatures

Operating temperature		Storage temperature	
Continuous operating temp., min.	-50 °C	Continuous operating temp., max.	120 °C

### Additional technical data

Explosion-tested version	No	Installation advice	Direct mounting
Number of similar terminals	1	Open sides	right
Type of mounting	Snap-on	Version	Screw connection, with diode, for screwable cross-connection, One end without connector

### Clampable wires (rated connection)

Type of connection	Screw connection	Stripping length	10 mm
Blade size	0.6 x 3.5 mm	Connection direction	on side
Number of connections	4	Clamping range, rated connection, min.	0.05 mm <sup>2</sup>
Clamping range, rated connection, max.	4 mm <sup>2</sup>	Clamping screw	M 2.5
Tightening torque, min.	0.4 Nm	Tightening torque, max.	0.6 Nm
Gauge to IEC 60947-1	A3	Wire connection cross section, solid core, max. rated connection	0.5 mm <sup>2</sup>
Wire connection cross section, solid core max. rated connection	4 mm <sup>2</sup>	Wire connection cross section, stranded, rated connection, min.	1.5 mm <sup>2</sup>
Wire connection cross section, stranded, rated connection, max.	4 mm <sup>2</sup>	Wire connection cross section, finely stranded, max.	4 mm <sup>2</sup>
Wire connection cross-section, finely stranded, min.	0.5 mm <sup>2</sup>	Wire connection cross section, finely stranded with wire-end ferrules DIN 46228/1, rated connection, min.	0.5 mm <sup>2</sup>
Wire connection cross section, finely stranded with wire-end ferrules DIN 46228/1, rated connection, max.	2.5 mm <sup>2</sup>	Wire connection cross section AWG, min.	AWG 26
Wire connection cross section AWG, max.	AWG 12		

### Dimensions

TS 35 offset	35.5 mm
--------------	---------

### Rated data

Rated cross-section	2.5 mm <sup>2</sup>	Rated impulse withstand voltage	6 kV
Rated current	10 A	Current at maximum wires	10 A
Standards	IEC 60947-7-1	Pollution severity	3

### UL ratings data

Certificate No. (UR)	E60693	Voltage size C (UR)	300 V
Current size C (UR)	1 A	Conductor size Factory wiring max. (UR)	12 AWG
Conductor size Factory wiring min. (UR)	30 AWG	Conductor size Field wiring max. (UR)	12 AWG

**Datenblatt**

**W-Series  
WDK 2.5 1D**

**Weidmüller Interface GmbH & Co. KG**  
 Klingenbergstraße 16  
 D-32758 Detmold  
 Germany  
 Fon: +49 5231 14-0  
 Fax: +49 5231 14-292083  
 www.weidmueller.com

**Technische Daten**

**Material data**

Material	Wemid	Colour	Dark Beige
UL 94 flammability rating	V-0		

**System specifications**

Product family	W-Series	Type of connection	Screw connection
Connection direction	on side	Number of levels	2
Number of connections	4	No. of clamping points per level	2
Levels cross-connected internally	Yes	End cover plate required	Yes

**Classifications**

ETIM 3.0	EC000903	UNSPSC	30-21-18-11
eClass 5.1	27-14-11-27	eClass 6.2	27-14-11-27
eClass 7.1	27-14-11-27		

**Product information**

Descriptive text ordering data	2.5 mm <sup>2</sup> conductor with ferrule with plastic collar, with collar optimised for diameter only (order No. 1333100000, QTY 500).
Descriptive text technical data	Rated current is 10 A for continuous busbars only. <b>Diode 1 N 4007</b>

**Approvals**

Approvals



ROHS	Conform
------	---------