

Pre-insulated Terminals





Hooked Blade

Material: Copper
Insulation: Polyvinyl Chloride
 UL approval E100455
 CSA approval 093995
 RoHS compliant

Max. elec. rating: ■ 19 amp
 ■ 27 amp
 ■ 48 amp
 600 volts 75°C

Wire Range mm ² (AWG)	Part No.	Dimensions mm								
		D1	D2	D3	D4	L	L1	H1	H2	T
● 0.5-1.5 (22 - 16)	30RHB	1.7	2.1	3.0	4.3	26.5	10.0	22.0	5.5	0.8
	46RHB	1.7	2.1	4.6	4.3	26.0	10.0	22.0	5.5	0.8
● 1.5-2.5 (16 - 14)	30BHB	2.3	2.1	3.0	4.8	26.5	10.0	22.0	5.5	0.8
	46BHB	2.3	2.1	4.6	4.8	26.5	10.0	22.0	5.5	0.8
● 4-6 (12 - 10)	30YHB	3.4	2.4	3.0	6.5	30.0	13.5	23.0	6.5	0.8
	46YHB	3.4	2.4	4.6	6.5	30.0	13.5	23.0	6.5	0.8

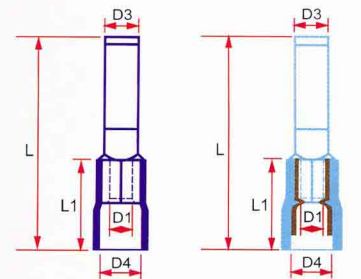

Standard

Vibration Resistant

Pack Quantity: 100