



0.25 - 2.5 (4) mm² ① AWG 22 - 12
 500 V/6 kV/3 ② 300 V, 20 A ③
 I_N 24 A (28 A) 600 V, 20 A ④


Terminal block width 5.2 mm / 0.205 in
 ⑤ 10 - 12 mm / 0.43 in ⑥



Item No.	Pack. Unit
Shield/through/through terminal block, with marker carrier, gray housing	
○ Shield/N/L 2002-3248	50
○ Shield/L/L 2002-3258	50
Shield/through/through terminal block, without marker carrier, gray housing	
○ Shield/N/L 2002-3218	50
○ Shield/L/L 2002-3228	50

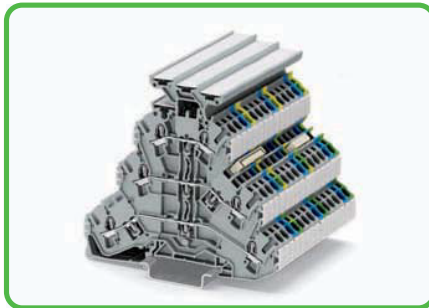

Triple-deck terminal block assembly

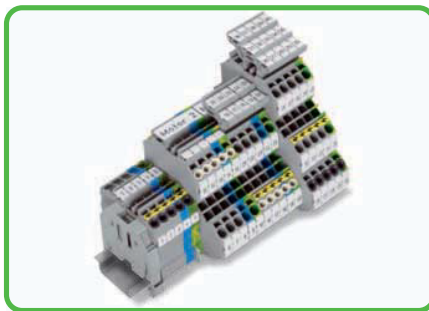

Combination of multilevel terminal blocks

- ① Conductor sizes: 0.25 mm² - 4 mm² "s + f-st"; Push-in conductor sizes: 0.75 mm² - 4 mm² "s" and 0.75 mm² - 2.5 mm² "insulated ferrules, 12 mm"
- ② 500 V = rated voltage
6 kV = rated surge voltage
3 = pollution degree
(also see Section 14)
- ③ Strip length, see packaging or instructions.
- ④ Suitable for Ex i applications
- ⑤ Suitable for Ex e II applications
440 V, 19 A
Jumper 17 A
(also see Section 14)
- ⑥ See application notes for:
Colored push-in type jumper bars, page 139
Vertical jumper, page 142

2002 Series Accessories

Appropriate marking systems: WMB/Marking strips/WMB Inline (see Section 13)

End and intermediate plate, 0.8 mm thick

orange	2002-3292	100 (4x25)
gray	2002-3291	100 (4x25)

Triple-deck marker carrier,

pivoting		
gray	2002-131	50 (2x25)

Insulation stop,

5 pcs/strip, 0.25 - 0.5 mm ²		
light gray	2002-171	200 (8x25)

Insulation stop,

5 pcs/strip, 0.75 - 1 mm ²		
dark gray	2002-172	200 (8x25)

Push-in type jumper bar, insulated,

⑥ I _N 25 A, light gray		
2-way	2002-402	200 (8x25)
3-way	2002-403	200 (8x25)
4-way	2002-404	200 (8x25)
5-way	2002-405	100 (4x25)
6-way	2002-406	100 (4x25)
7-way	2002-407	100 (4x25)
8-way	2002-408	100 (4x25)
9-way	2002-409	100 (4x25)
10-way	2002-410	100 (4x25)

Push-in type jumper bar, insulated,

I _N 25 A, light gray		
from 1 to 3	2002-433	200 (8x25)
from 1 to 4	2002-434	200 (8x25)
from 1 to 5	2002-435	100 (4x25)
from 1 to 6	2002-436	100 (4x25)
from 1 to 7	2002-437	100 (4x25)
from 1 to 8	2002-438	100 (4x25)
from 1 to 9	2002-439	100 (4x25)
from 1 to 10	2002-440	100 (4x25)

Triple-deck vertical jumper, insulated,

⑥ I _N 24 A, light gray	2002-493	100 (4x25)
-----------------------------------	----------	------------

Double-deck vertical jumper, insulated,

⑥ I _N 24 A, light gray	2002-492	100 (4x25)
-----------------------------------	----------	------------