0.25 - 2.5 (4) mm² ❶	AWG 22 - 12
500 V/6 kV/3 ❷	300 V, 20 A
I_N 24 A (28 A)	600 V, 20 A

Terminal block width 5.2 mm / 0.205 in
10 - 12 mm / 0.43 in ❸



❶ Conductor sizes: 0.25 mm² – 4 mm² "s + f-st"; Push-in conductor sizes: 0.75 mm² – 4 mm² "s" and 0.75 mm² – 2.5 mm² "insulated ferrules, 12 mm"

❷ 500 V = rated voltage
6 kV = rated surge voltage
3 = pollution degree
(also see Section 14)

❸ Strip length, see packaging or instructions.

❹ Suitable for Ex i applications

❺ Suitable for Ex e II applications
440 V, 19 A
Jumper 17 A
(also see Section 14)

❻ See application notes for:
Colored push-in type jumper bars, page 139
Vertical jumper, page 142

	Item No.	Pack. Unit
Shield/through/through terminal block,		
with marker carrier,		
gray housing		
Shield/N/L	**2002-3248**	50
Shield/L/L	**2002-3258**	50
Shield/through/through terminal block,		
without marker carrier,		
gray housing		
Shield/N/L	**2002-3218**	50
Shield/L/L	**2002-3228**	50

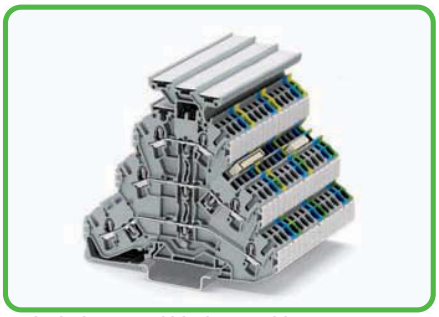

Triple-deck terminal block assembly

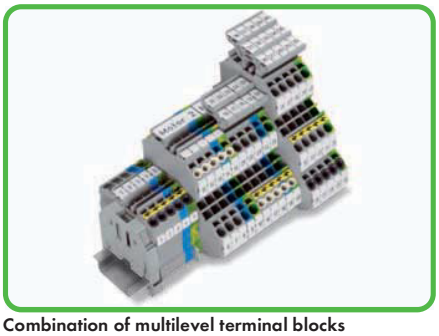

Combination of multilevel terminal blocks

2002 Series Accessories

Appropriate marking systems: WMB/Marking strips/WMB Inline (see Section 13)

End and intermediate plate, 0.8 mm thick			
	orange	**2002-3292**	100 (4x25)
	gray	**2002-3291**	100 (4x25)
Triple-deck marker carrier,			
	pivoting		
	gray	**2002-131**	50 (2x25)
Insulation stop,			
	5 pcs/strip,		
	0.25 - 0.5 mm²		
	light gray	**2002-171**	200 (8x25)
Insulation stop,			
	5 pcs/strip,		
	0.75 - 1 mm²		
	dark gray	**2002-172**	200 (8x25)
Push-in type jumper bar, insulated,			
❻	I_N 25 A,		
	light gray		
	2-way	**2002-402**	200 (8x25)
	3-way	**2002-403**	200 (8x25)
	4-way	**2002-404**	200 (8x25)
	5-way	**2002-405**	100 (4x25)
	6-way	**2002-406**	100 (4x25)
	7-way	**2002-407**	100 (4x25)
	8-way	**2002-408**	100 (4x25)
	9-way	**2002-409**	100 (4x25)
	10-way	**2002-410**	100 (4x25)
Push-in type jumper bar, insulated,			
	I_N 25 A,		
	light gray		
	from 1 to 3	**2002-433**	200 (8x25)
	from 1 to 4	**2002-434**	200 (8x25)
	from 1 to 5	**2002-435**	100 (4x25)
	from 1 to 6	**2002-436**	100 (4x25)
	from 1 to 7	**2002-437**	100 (4x25)
	from 1 to 8	**2002-438**	100 (4x25)
	from 1 to 9	**2002-439**	100 (4x25)
	from 1 to 10	**2002-440**	100 (4x25)
Triple-deck vertical jumper, insulated,			
❻	I_N 24 A		
	light gray	**2002-493**	100 (4x25)
Double-deck vertical jumper, insulated,			
❻	I_N 24 A		
	light gray	**2002-492**	100 (4x25)