


## Assembly



Assembling modular terminal blocks into terminal strips.




### Mounting an end plate.

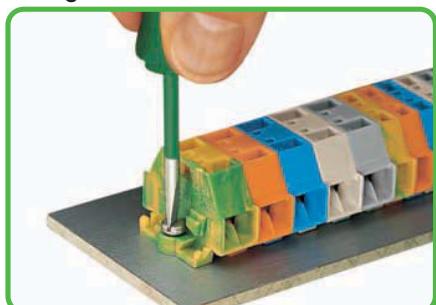


Terminal strip with fixing flanges, screw mount.


## CAGE CLAMP® connection

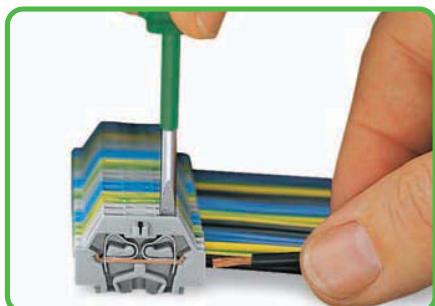


## Conductor termination

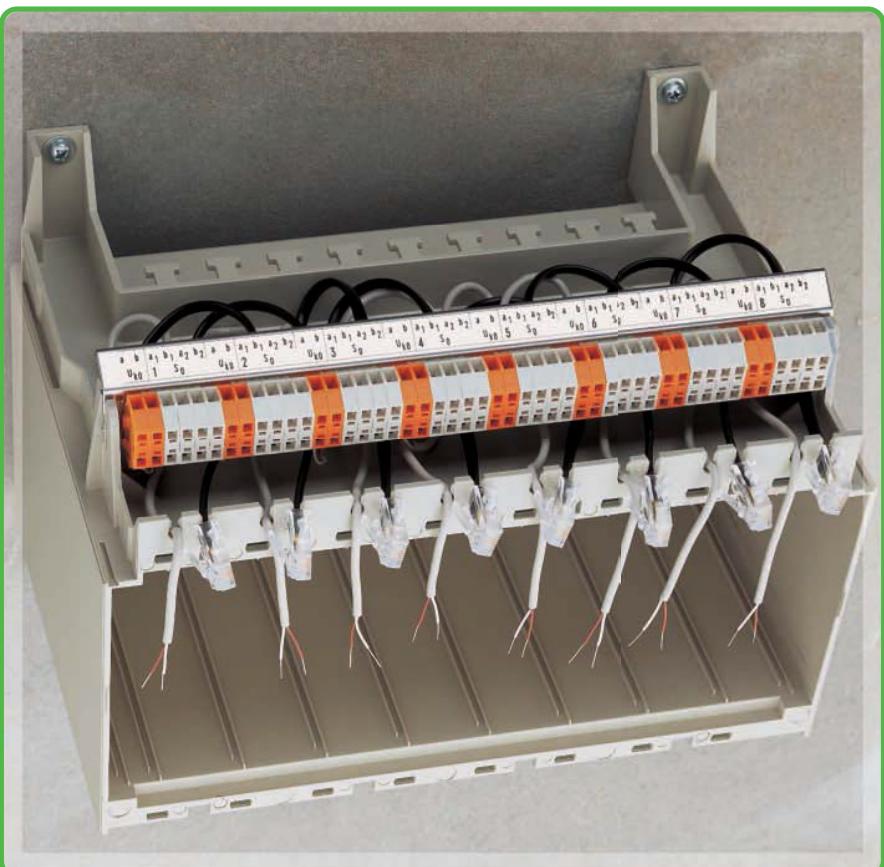


## Types

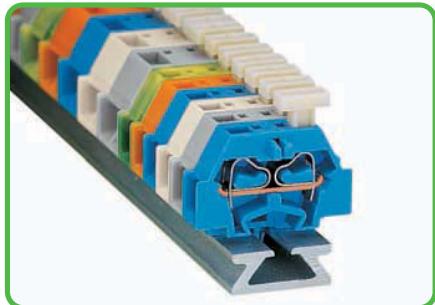

Terminal strip with push-buttons on one side.

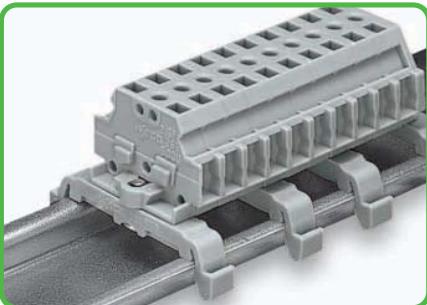

Terminal strip with marker slot for miniature WSB Quick marking system.

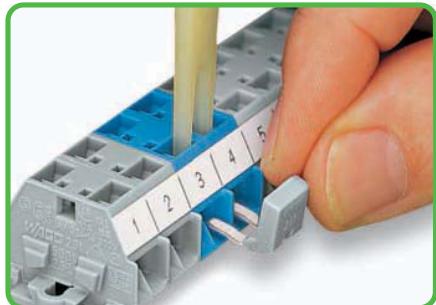


Commoning with comb-style jumper bar.



**CAGE CLAMP®**  
clamps the following  
copper conductors:\*

solid



stranded



fine-stranded,  
also with tinned  
single strands

\* For aluminum conductors, see notes in Section 14.

## – Description and Handling –

### Fixing



Terminal strip with snap-in mounting feet, mounting in holes.





Terminal strip with snap-in mounting feet, mounting onto special aluminum rail.



Terminal strip with fixing flanges, screw mounting of 209-123 mounting adapter  
(The distance between mounting adapters should be 35 – 40 mm / 1.378 – 1.575 in max.).

### Fixing

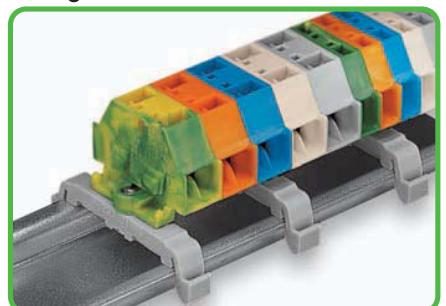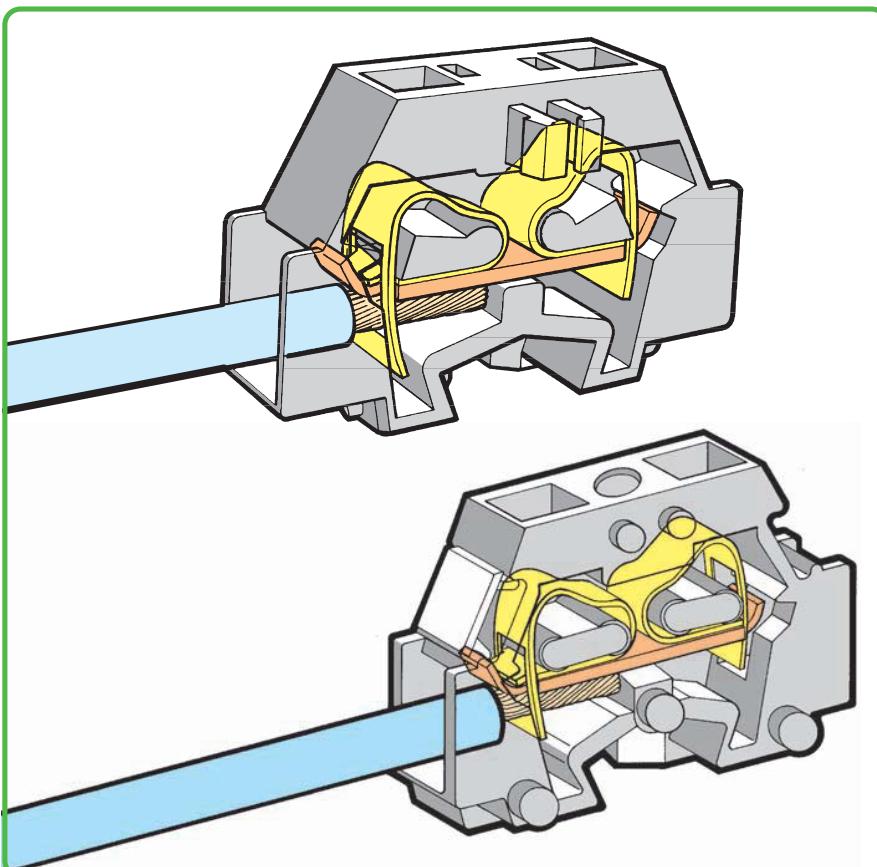

Terminal strip with fixing flanges, on DIN 35 rail.

### Fixing



Terminal strip with snap-in mounting feet, connecting to 209-123 mounting adapter  
(The distance between mounting adapters should be 35 – 40 mm / 1.378 – 1.575 in max.).


### Marking



Marking with self-adhesive marker strips.



Marking by direct printing (on request).

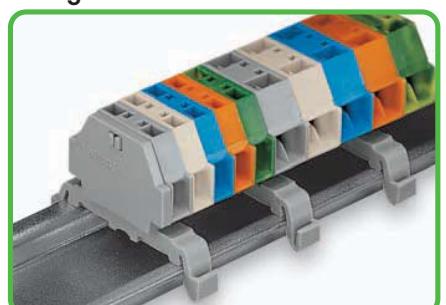

Terminal strip with snap-in mounting feet, on DIN 35 rail.

fine-stranded,  
tip-bonded

fine-stranded,  
with ferrule ①  
(gastight crimped)

fine-stranded,  
with pin terminal  
(gastight crimped)

① When using ferruled conductors, it is necessary to use a terminal block one size larger than the nominal cross section of the wire.

# Modular Terminal Blocks with Fixing Flange or Snap-In Mounting Foot 1.5 mm<sup>2</sup>

## 260 Series

CAGE CLAMP®

0.08 - 1.5 mm <sup>2</sup> 400 V/6 kV/3 ① I <sub>N</sub> 18 A	AWG 28 - 16 300 V, 10 A ② 300 V, 15 A ③
Terminal block width 5 mm / 0.197 in 8 - 9 mm / 0.33 in ②	

0.08 - 1.5 mm <sup>2</sup> 400 V/6 kV/3 ① I <sub>N</sub> 18 A	AWG 28 - 16 300 V, 10 A ② 300 V, 15 A ③
Terminal block width 8 mm / 0.315 in 8 - 9 mm / 0.33 in ②	



- ① 400 V = rated voltage  
6 kV = rated surge voltage  
3 = pollution degree  
(also see Section 14)

② Strip length, see packaging or instructions.

③ See application notes for:  
Test plug module, page 456

Color	Item No.	Pack. Unit	Color	Item No.	Pack. Unit	260 Series Accessories			
<b>2-conductor terminal block with fixing flange, for screw or similar mounting types, fixing hole 3.2 mm Ø, with 209-123 mounting adapter also for DIN 35 rail</b>			<b>4-conductor terminal block with fixing flange, for screw or similar mounting types, fixing hole 3.2 mm Ø, with 209-123 mounting adapter also for DIN 35 rail</b>			Marking accessories, see Section 13			
gray	260-301	300 (6x50)	gray	260-331	300 (6x50)	<b>Aluminum carrier rail,</b> 1000 mm long, 18 mm wide, 7 mm high <b>210-154</b> 1			
light gray	260-303	300 (6x50)	light gray	260-333	300 (6x50)	<b>End stop, for WSB Quick markers,</b> for 210-154 aluminum rail, 6 mm wide <b>209-122</b> 25			
blue	260-304	300 (6x50)	blue	260-334	300 (6x50)	<b>Mounting foot, for DIN 35 rail, can be snapped on</b> terminal blocks with snap-in mounting foot, 6.4 mm wide <b>209-120</b> 25			
orange	260-306	300 (6x50)	orange	260-336	300 (6x50)	<b>Mounting foot with screw, for DIN 35 rail, can be</b> screwed on terminal blocks with fixing flange, 6.4 mm wide <b>209-123</b> 25			
green-yellow	260-307	300 (6x50)	green-yellow	260-337	300 (6x50)	<b>Mounting adapter, for DIN 35 rail,</b> can be used as end plate, 6.5 mm wide <b>209-137</b> 25			
<b>2-conductor terminal block with snap-in mounting foot, for plate thickness 0.6-1.2 mm, fixing hole 3.5 mm Ø, fits 210-154 aluminum rail or with 209-120 mounting adapter for DIN 35 rail</b>			<b>4-conductor terminal block with snap-in mounting foot, for plate thickness 0.6-1.2 mm, fixing hole 3.5 mm Ø, fits 210-154 aluminum rail or with 209-120 mounting adapter for DIN 35 rail</b>			<b>Test plug,</b> with 500 mm cable, 2 mm Ø <b>210-136</b> 50			
gray	260-311	300 (6x50)	gray	260-341	300 (6x50)	<b>Test plug,</b> with 500 mm cable, 2.3 mm Ø <b>210-137</b> 50			
light gray	260-313	300 (6x50)	light gray	260-343	300 (6x50)				
blue	260-314	300 (6x50)	blue	260-344	300 (6x50)				
orange	260-316	300 (6x50)	orange	260-346	300 (6x50)				
green-yellow	260-317	300 (6x50)	green-yellow	260-347	300 (6x50)				
<b>2-conductor end terminal block, without fixing foot, for terminal strips with snap-in mounting feet</b>			<b>4-conductor end terminal block, without fixing foot, for terminal strips with snap-in mounting feet</b>			<b>Operating tool with partially insulated shaft,</b> type 2, (3.5 x 0.5) mm blade <b>210-720</b> 1			
gray	260-321	300 (6x50)	gray	260-351	300 (6x50)				
light gray	260-323	300 (6x50)	light gray	260-353	300 (6x50)				
blue	260-324	300 (6x50)	blue	260-354	300 (6x50)				
orange	260-326	300 (6x50)	orange	260-356	300 (6x50)				
green-yellow	260-327	300 (6x50)	green-yellow	260-357	300 (6x50)				
<b>Item-Specific Accessories</b>			<b>Item-Specific Accessories</b>						
<b>Test plug module,</b> ③ can be snapped together, 5 mm wide gray 249-135 100 (4x25)			<b>Test plug module,</b> ③ can be snapped together, 8 mm wide gray 249-138 100 (4x25)			<b>Operating tool with partially insulated shaft,</b> type 2, (3.5 x 0.5) mm blade <b>210-720</b> 1			
<b>Test plug module with locking levers,</b> ③ can be snapped together, 5 mm wide gray 260-404 100 (4x25)			<b>Test plug module with locking levers,</b> ③ can be snapped together, 8 mm wide gray 260-405 100 (4x25)						
<b>260 Series Accessories</b>									
For marking accessories, see Section 13									
<b>End plate with fixing flange</b> gray 260-361 300 (6x50)			<b>Comb-style jumper bar, insulated, I<sub>N</sub> 10 A, gray,</b> reduces maximum conductor size to 1 mm <sup>2</sup> /AWG 16 2-way 260-402 25						
<b>End plate with snap-in mounting foot</b> gray 260-371 300 (6x50)			<b>Operating tool, of insulating material,</b> for inserting comb-style jumper bars 2-way 209-132 1						