



Rail-Mounted Terminal Blocks, Side-Entry 279 to 284 Series

Assembly

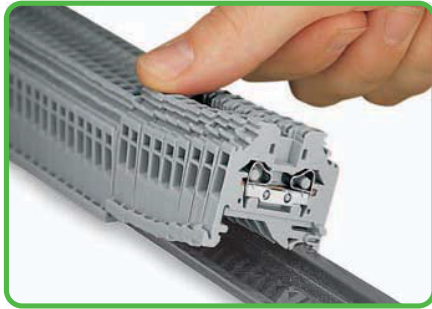

Snapping side-entry rail-mounted terminal blocks onto the carrier rail.

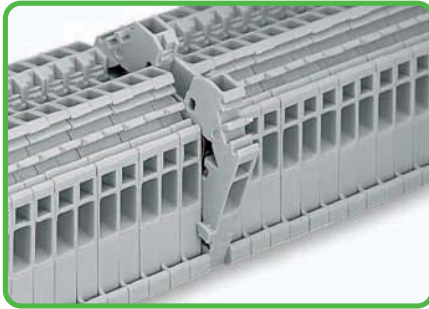


Quick assembly keys prevent reverse mounting.

Removal




Removal from the carrier rail.

CAGE CLAMP® connection

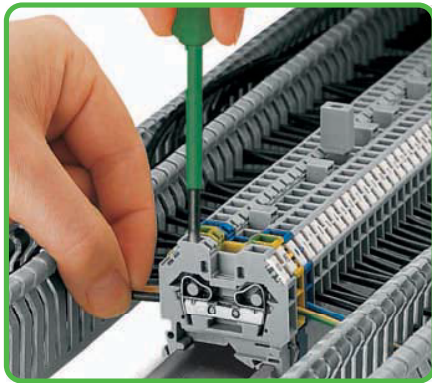


Conductor termination


Testing

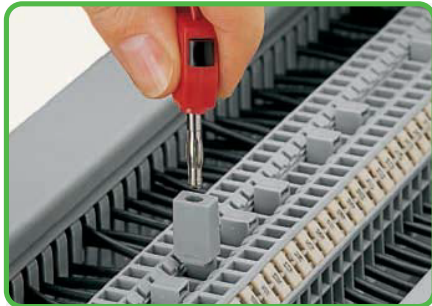

Testing with test plug adapter.

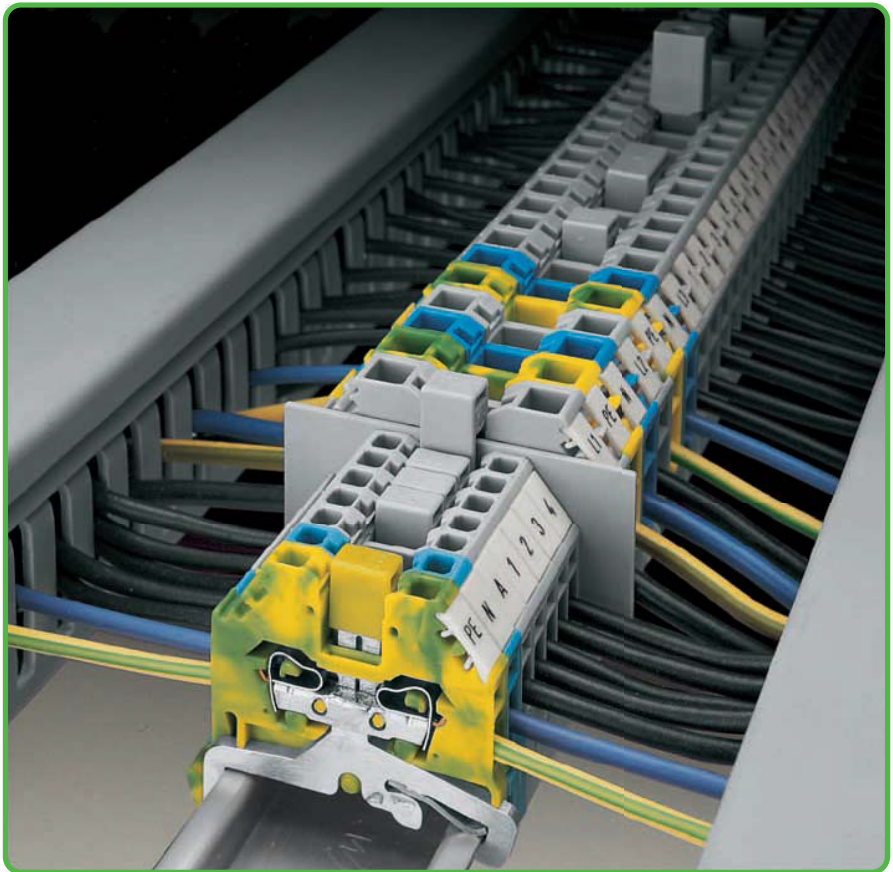


Commoning

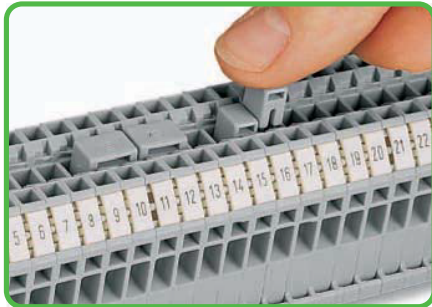


Commoning with adjacent jumpers.

Commoning with step-down jumpers

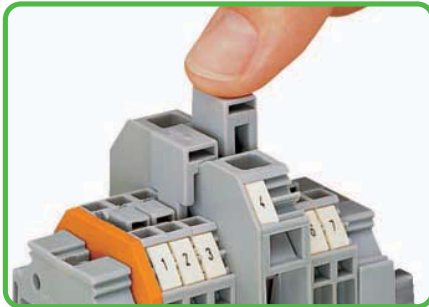


Commoning side-entry rail-mounted terminal blocks with step-down jumpers.




CAGE CLAMP®
clamps the following
copper conductors:*

solid



stranded



fine-stranded,
also with tinned
single strands


* For aluminum conductors, see notes in Section 14.

- Description and Handling -




Suitable for all DIN 35 rails.

Fuse terminal blocks

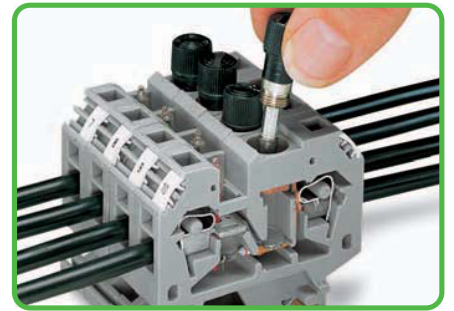


Replacing a fuse.

Disconnect terminal blocks for test and measurement

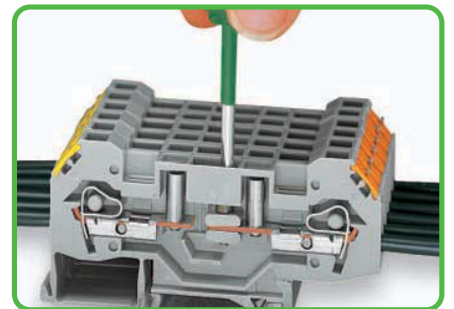

Shifting the disconnect slide link.

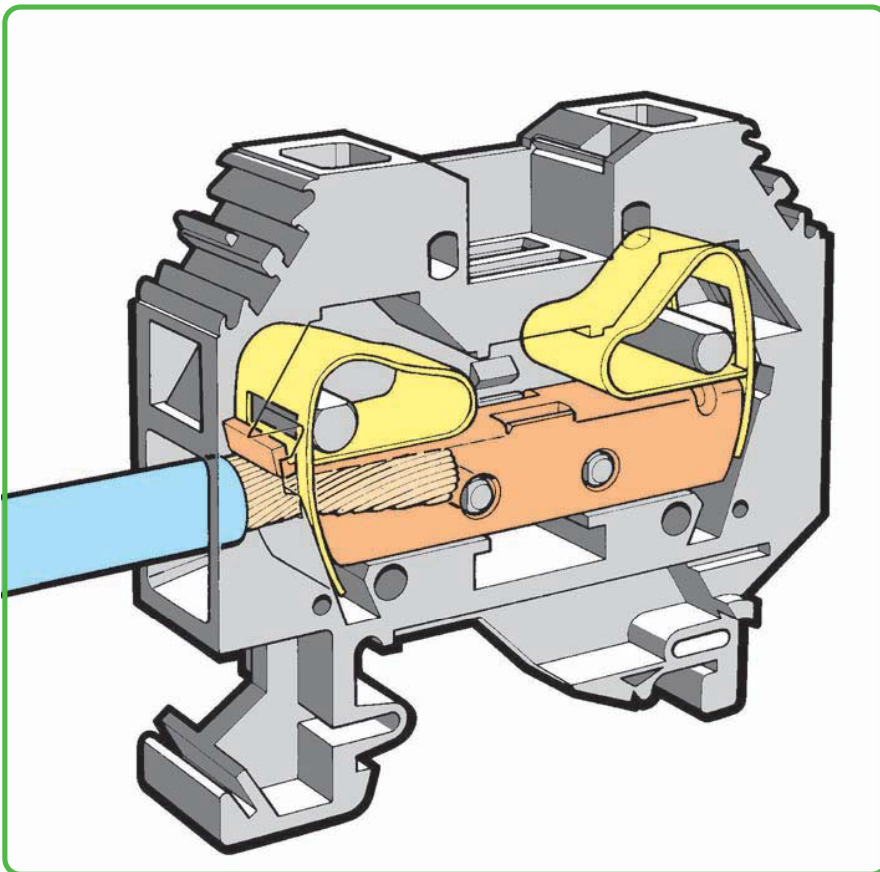

Marking




Marking with WMB Multi marking system.



fine-stranded, tip-bonded



fine-stranded, with ferrule ❶ (gaslight crimped)






fine-stranded, with pin terminal (gaslight crimped)

❶ When using ferruled conductors, it is necessary to use a terminal block one size larger than the nominal cross section of the wire.

Through and Ground Conductor Terminal Blocks 1.5 mm² to 6 mm² 279 to 282 Series

0.08 - 1.5 mm ² 800 V/8 kV/3 ① I _N 18 A Terminal block width 4 mm / 0.157 in 8 - 9 mm / 0.33 in ②	AWG 28 - 16 600 V, 10 A ③ 600 V, 15 A ④	0.08 - 2.5 mm ² 800 V/8 kV/3 ① I _N 24 A Terminal block width 5 mm / 0.197 in 8 - 9 mm / 0.33 in ②	AWG 28 - 12 * 600 V, 20 A ③ 600 V, 20 A ④	0.08 - 4 mm ² 800 V/8 kV/3 ① I _N 32 A Terminal block width 6 mm / 0.236 in 9 - 10 mm / 0.37 in ②	AWG 28 - 12 600 V, 20 A ③ 600 V, 25 A ④
---	---	---	---	--	---



Item No.	Pack. Unit	Item No.	Pack. Unit	Item No.	Pack. Unit
2-conductor through terminal block		2-conductor through terminal block		2-conductor through terminal block	
gray 279-101	100	gray 280-101	100	gray 281-101	100
blue 279-104 ③	100	blue 280-104 ③	100	blue 281-104 ③	100
2-conductor ground terminal block		2-conductor ground terminal block		2-conductor ground terminal block	
		green-yellow 280-107	100	green-yellow 281-107	100
Item-Specific Accessories		Item-Specific Accessories		Item-Specific Accessories	
End and intermediate plate, 2.5 mm thick		End and intermediate plate, 2.5 mm thick		End and intermediate plate, 3 mm thick	
orange 280-302	100 (4x25)	orange 280-302	100 (4x25)	orange 281-302	100 (4x25)
gray 280-301	100 (4x25)	gray 280-301	100 (4x25)	gray 281-301	100 (4x25)
Separator, oversized, 2 mm thick		Separator, oversized, 2 mm thick		Separator, oversized, 2 mm thick	
orange 280-322	100 (4x25)	orange 280-322	100 (4x25)	orange 281-322	100 (4x25)
gray 280-332	100 (4x25)	gray 280-332	100 (4x25)	gray 281-332	100 (4x25)
Adjacent jumper, insulated, I_N 15 A		Adjacent jumper, insulated, I_N = I_N terminal block		Adjacent jumper, insulated, I_N = I_N terminal block	
gray 279-402	200 (8x25)	gray 280-402	200 (8x25)	gray 281-402	200 (8x25)
yellow-green 279-422	200 (8x25)	yellow-green 280-422	200 (8x25)	yellow-green 281-422	200 (8x25)
Alternate jumper, insulated, I_N 15 A		Alternate jumper, insulated, I_N = I_N terminal block		Alternate jumper, insulated, I_N = I_N terminal block	
gray 279-409	100 (4x25)	gray 280-409	100 (4x25)	gray 281-409	100 (4x25)
Step-down jumper, insulated, I_N 15 A		Step-down jumper, insulated, I_N 15 A		Step-down jumper, insulated, I_N 15 A	
gray 284-414	50 (2x25)	gray 284-414	50 (2x25)	gray 284-414	50 (2x25)
Intermediate plate, 1 mm thick		Intermediate plate, 1 mm thick		Intermediate plate, 1 mm thick	
gray 281-333	100 (4x25)	gray 281-333	100 (4x25)	gray 281-333	100 (4x25)
orange 281-336	100 (4x25)	orange 281-336	100 (4x25)	orange 281-336	100 (4x25)
Protective warning marker, with high-voltage symbol, black, for 5 terminal blocks		Protective warning marker, with high-voltage symbol, black, for 5 terminal blocks		Step-down jumper, insulated, I_N 30 A	
yellow 279-405	100 (4x25)	yellow 280-405	100 (4x25)	gray 284-413	50 (2x25)
Test plug adapter, 8.3 mm wide, for terminal blocks 1.5 - 10 mm², for test plug 4 mm Ø		Test plug adapter, 8.3 mm wide, for terminal blocks 1.5 - 10 mm², for test plug 4 mm Ø		Step-down jumper, insulated, I_N 32 A	
gray 209-170	50 (2x25)	gray 209-170	50 (2x25)	gray 283-414	50 (2x25)
Test plug adapter, 5 mm wide, for terminal blocks 1.5 - 4 mm², for 210-137 test plug 2.3 mm Ø		Test plug adapter, 5 mm wide, for terminal blocks 1.5 - 4 mm², for 210-137 test plug 2.3 mm Ø		Protective warning marker, with high-voltage symbol, black, for 5 terminal blocks	
gray 280-404	100 (4x25)	gray 280-404	100 (4x25)	yellow 281-405	100 (4x25)
				Test plug adapter, 8.3 mm wide, for terminal blocks 1.5 - 10 mm², for test plug 4 mm Ø	
				gray 209-170	
				50 (2x25)	