



Rail-Mounted Terminal Blocks with Miniature Switching Relay

Relay with 1 changeover contact (1u)
for normal switching power
Nominal input voltage V_N
5 V, 12 V, 24 V, 48 V, 60 V, 110 V, 220 V DC

Relay with 1 changeover contact (1u)
for normal switching power
Nominal input voltage V_N
12 V, 24 V, 48 V, 115 V, 230 V AC/DC

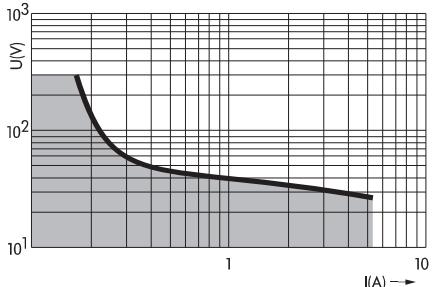

Note: Inductive loads have to be attenuated by an appropriate protective circuit in order to protect relay coils and contacts.

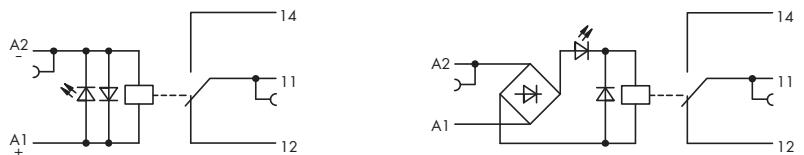

Description	V_N	I_N	Item No.	Pack. Unit	V_N	I_N	Item No.	Pack. Unit
Rail-mounted terminal blocks with miniature switching relay, for DIN 35 rail	5 V DC	31 mA	859-302	1	12 V AC/DC	15 mA	859-353	1
	12 V DC	17 mA	859-303	1	24 V AC/DC	8 mA	859-354	1
	24 V DC	10 mA	859-304	1	48 V AC/DC	5.3 mA	859-355	1
	48 V DC	6.5 mA	859-305	1	115 V AC/DC	3.5 mA	859-357	1
	60 V DC	5.2 mA	859-306	1	230 V AC/DC	3.5 mA	859-358	1
	120 V DC	3.5 mA	859-307	1				
	220 V DC	3.2 mA	859-308	1				

Technical Data

Accessories see page 49

Accessories see page 49

Contact material	AgSnO_2		AgSnO_2
Input voltage range	V_N -15 % ... +10 %		V_N -15 % ... +10 %
Max. switching voltage	250 V AC		250 V AC
Max. continuous current (terminal blocks in a row)	5 A		5 A
Max. Switching power (resistive)	1250 VA AC ; DC see load limit curve		1250 VA AC ; DC see load limit curve
Recommended minimum load	$\geq 100 \text{ mA} / 12 \text{ V AC/DC}$		$\geq 100 \text{ mA} / 12 \text{ V AC/DC}$
Max. switching rate with / without load	$6 \text{ min}^{-1} / 20 \text{ s}^{-1}$		$6 \text{ min}^{-1} / 20 \text{ s}^{-1}$
Operating power	$< 320 \text{ mW}$		$< 300 \text{ mW}$
Pull-in/drop-out/bounce time typ.	5 ms / 6 ms / 5 ms		5 ms / 6 ms / 5 ms
Nominal operating mode	continuous duty		continuous duty
Dielectric strength contact-coil	4 kV		4 kV
Dielectric strength contact-coil (1.2/50 μs)	6 kV		6 kV
Surge capacity open contact	1 kV		1 kV
Nominal voltage acc. to VDE 0110 Part 1/4.97, IEC 60664-1	250 V / 4 kV / 3		250 V / 4 kV / 3
Mechanical life	5×10^6 switching operations		5×10^6 switching operations
Mechanical life at max. load (resistance)	3×10^5 switching operations		3×10^4 switching operations
Ambient operating temperature (V_N)	-25 °C ... +50 °C		-25 °C ... +50 °C
Ambient operating temperature (1.2 x V_N)	-25 °C ... +40 °C		25 °C ... +40 °C
Storage temperature	-40 °C ... +70 °C		-40 °C ... +70 °C
Dimensions (mm) W x H x L	6 x 56 x 91		6 x 56 x 91
Wire connection	Height from upper-edge of DIN 35 rail		Height from upper-edge of DIN 35 rail
Cross sections	CAGE CLAMP®		CAGE CLAMP®
Stripped lengths	0.08 mm² ... 2.5 mm² / AWG 28 ... 14		0.08 mm² ... 2.5 mm² / AWG 28 ... 14
Approvals	5 ... 6 mm / 0.22 in		5 ... 6 mm / 0.22 in
	VDE 0110 / EN 60664; VDE 0435 / EN 61810-5;		VDE 0110 / EN 60664; VDE 0435 / EN 61810-5;
	UL 508; EEx nC II T4 / DEMKO 02 ATEX 132280U; @		UL 508; EEx nC II T4 / DEMKO 02 ATEX 132280U; @