



# Modular Terminal Blocks with Fixing Flange or Snap-In Mounting Foot 4 mm<sup>2</sup>













## 262 Series

CAGE CLAMP®

0.08 - 4 mm <sup>2</sup> 630 V/8 kV/3 ① I <sub>N</sub> 24 A	AWG 28 - 12 300 V, 20 A <sup>②</sup> 300 V, 20 A <sup>③</sup>	0.08 - 4 mm <sup>2</sup> 630 V/8 kV/3 ① I <sub>N</sub> 32 A	AWG 28 - 12 300 V, 20 A <sup>②</sup> 300 V, 20 A <sup>③</sup>
Terminal block width 7 mm / 0.276 in  9 - 10 mm / 0.37 in ②		Terminal block width 12 mm / 0.472 in  9 - 10 mm / 0.37 in ②	




- ① 630 V = rated voltage  
8 kV = rated surge voltage  
3 = pollution degree  
(also see Section 14)
- ② Strip length, see packaging or instructions.
- ③ Suitable for Ex i applications
- ④ See application notes for:  
Test plug module, page 456

Color	Item No.	Pack. Unit	Color	Item No.	Pack. Unit	262 Series Accessories
2-conductor terminal block with fixing flange, for screw or similar mounting types, fixing hole 3.2 mm Ø, with 209-123 mounting adapter also for DIN 35 rail			4-conductor terminal block with fixing flange, for screw or similar mounting types, fixing hole 3.2 mm Ø, with 209-123 mounting adapter also for DIN 35 rail			
gray	<b>262-301</b>	100 (2x50)	gray	<b>262-331</b>	100 (2x50)	
blue	<b>262-304</b> ③	100 (2x50)	blue	<b>262-334</b> ③	100 (2x50)	<b>Test plug,</b>  with 500 mm cable, 2 mm Ø red <b>210-136</b> 50
orange	<b>262-306</b>	100 (2x50)	orange	<b>262-336</b>	100 (2x50)	
green-yellow	<b>262-307</b>	100 (2x50)	green-yellow	<b>262-337</b>	100 (2x50)	<b>Test plug,</b>  with 500 mm cable, 2.3 mm Ø yellow <b>210-137</b> 50
2-conductor terminal block with snap-in mounting foot, for plate thickness 0.6-1.2 mm, fixing hole 3.5 mm Ø, fits 210-154 aluminum rail or with 209-120 mounting adapter for DIN 35 rail			4-conductor terminal block with snap-in mounting foot, for plate thickness 0.6-1.2 mm, fixing hole 3.5 mm Ø, fits 210-154 aluminum rail or with 209-120 mounting adapter for DIN 35 rail			
gray	<b>262-311</b>	100 (2x50)	gray	<b>262-341</b>	100 (2x50)	
blue	<b>262-314</b> ③	100 (2x50)	blue	<b>262-344</b> ③	100 (2x50)	
orange	<b>262-316</b>	100 (2x50)	orange	<b>262-346</b>	100 (2x50)	
green-yellow	<b>262-317</b>	100 (2x50)	green-yellow	<b>262-347</b>	100 (2x50)	
2-conductor end terminal block, without fixing foot, for terminal strips with snap-in mounting feet			4-conductor end terminal block, without fixing foot, for terminal strips with snap-in mounting feet			
gray	<b>262-321</b>	100 (2x50)	gray	<b>262-351</b>	100 (2x50)	
blue	<b>262-324</b> ③	100 (2x50)	blue	<b>262-354</b> ③	100 (2x50)	
orange	<b>262-326</b>	100 (2x50)	orange	<b>262-356</b>	100 (2x50)	
green-yellow	<b>262-327</b>	100 (2x50)	green-yellow	<b>262-357</b>	100 (2x50)	
<b>Item-Specific Accessories</b>			<b>Item-Specific Accessories</b>			
<b>Test plug module,</b> ④  can be snapped together, 7 mm wide gray <b>249-137</b> 100 (4x25)			<b>Test plug module,</b> ④  can be snapped together, 12 mm wide gray <b>249-140</b> 100 (4x25)			
<b>262 Series Accessories</b>						
For marking accessories, see Section 13						
<b>End plate with fixing flange</b>  gray <b>262-361</b> 50			<b>Aluminum carrier rail,</b>  1000 mm long, 18 mm wide, 7 mm high <b>210-154</b> 1			
<b>End plate with snap-in mounting foot</b>  gray <b>262-371</b> 50			<b>End stop, for WSB Quick markers,</b>  for 210-154 aluminum rail, 6 mm wide <b>209-122</b> 25			
<b>Comb-style jumper bar, insulated, I<sub>N</sub> 16 A, gray,</b>  reduces maximum conductor size to 2.5 mm <sup>2</sup> /AWG 14 2-way <b>262-402</b> 25			<b>Mounting foot, for DIN 35 rail, can be snapped on</b>  terminal blocks with snap-in mounting foot, 6.4 mm wide gray <b>209-120</b> 25			
<b>Operating tool, of insulating material,</b>  for inserting comb-style jumper bars 2-way <b>209-132</b> 1			<b>Mounting foot with screw, for DIN 35 rail, can be</b>  screwed on terminal blocks with fixing flange, 6.4 mm wide gray <b>209-123</b> 25			

# Modular Terminal Blocks and Terminal Strips 260 to 262 Series

## Assembly

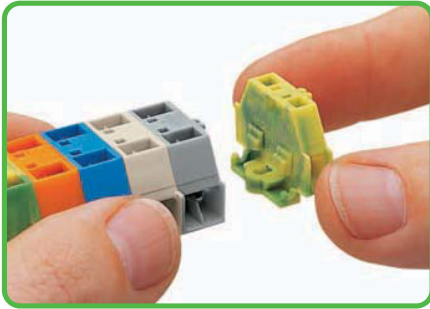


Assembling modular terminal blocks into terminal strips.




Mounting an end plate.

## Fixing

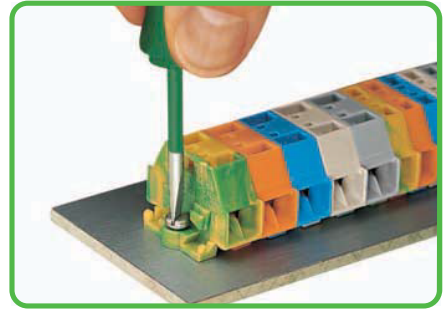


Terminal strip with fixing flanges, screw mount.

## CAGE CLAMP® connection

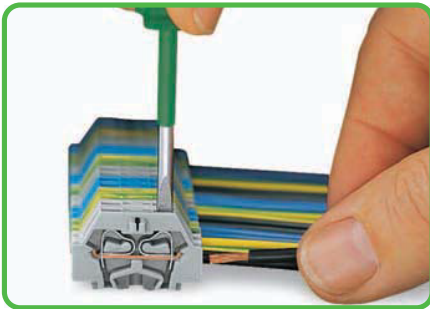


Conductor termination


## CAGE CLAMP® connection

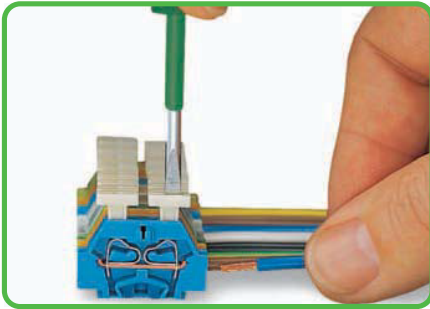


Conductor termination via push-button.

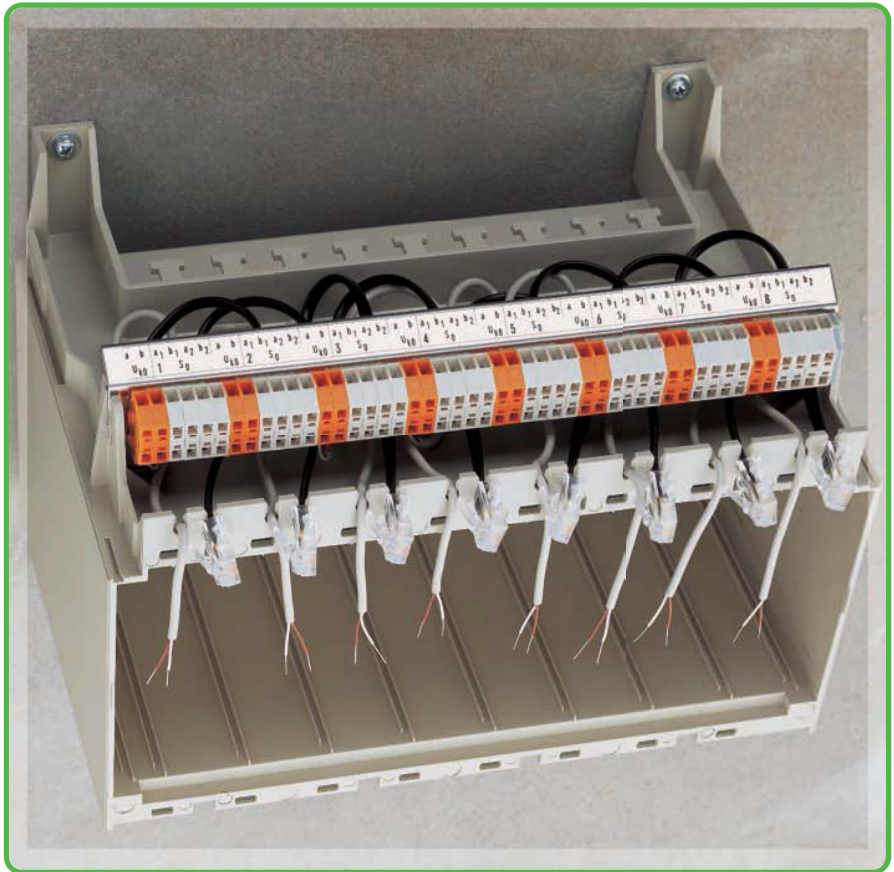

## Types

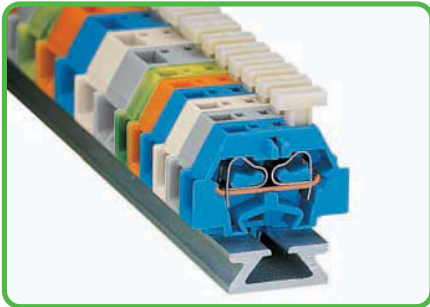


Terminal strip with push-buttons on one side.

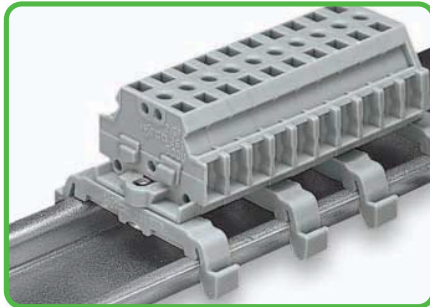


Terminal strip with marker slot for miniature WSB Quick marking system.

## Commoning

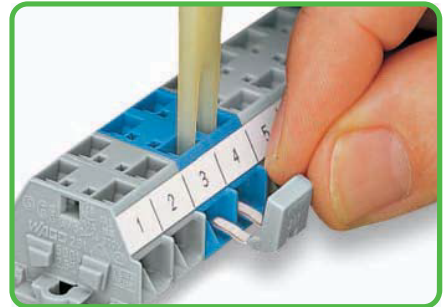


Commoning with comb-style jumper bar.




**CAGE CLAMP®**  
clamps the following  
copper conductors:\*

solid



stranded



fine-stranded,  
also with tinned  
single strands


\* For aluminum conductors, see notes in Section 14.

- Description and Handling -


Fixing




Terminal strip with snap-in mounting feet, mounting in holes.

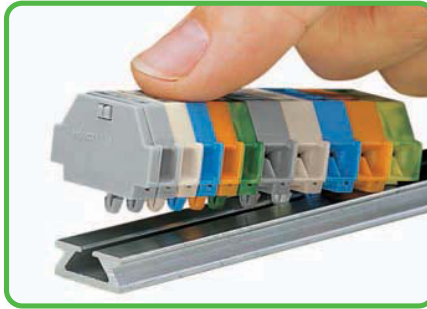


Terminal strip with snap-in mounting feet, mounting onto special aluminum rail.

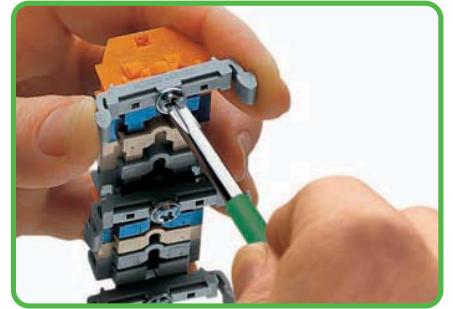

Terminal strip with fixing flanges, screw mounting of 209-123 mounting adapter (The distance between mounting adapters should be 35 - 40 mm / 1.378 - 1.575 in max.).

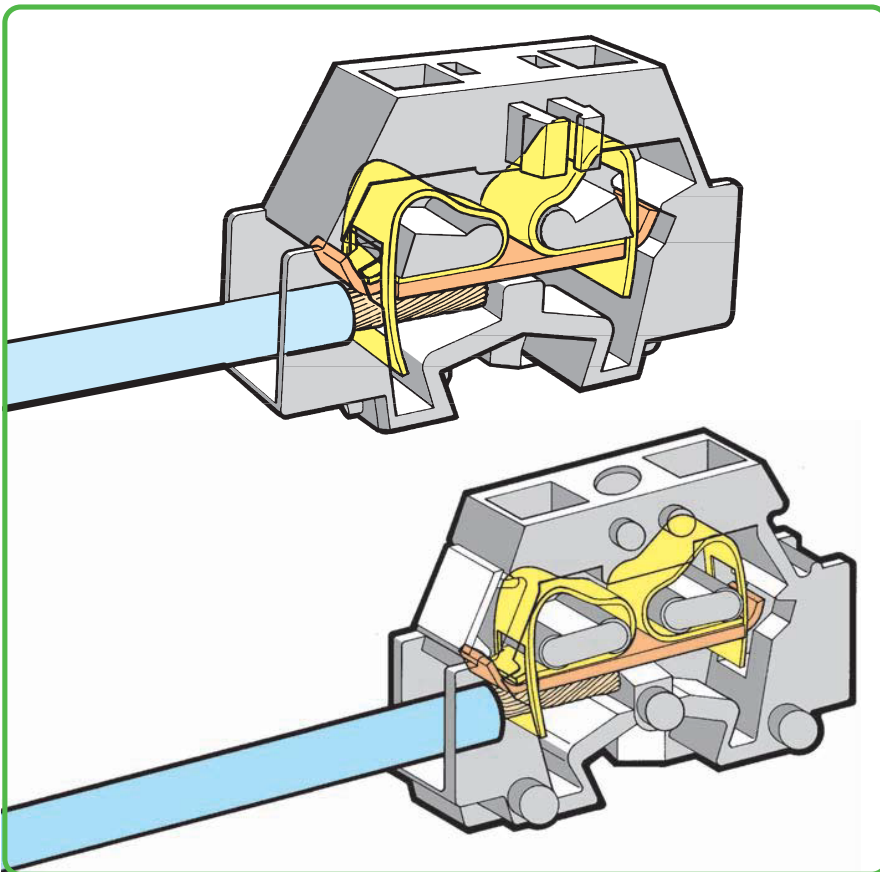


Fixing

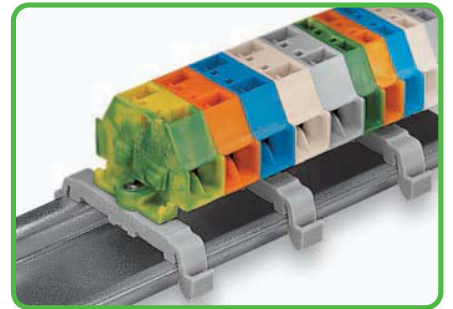

Terminal strip with fixing flanges, on DIN 35 rail.

Fixing

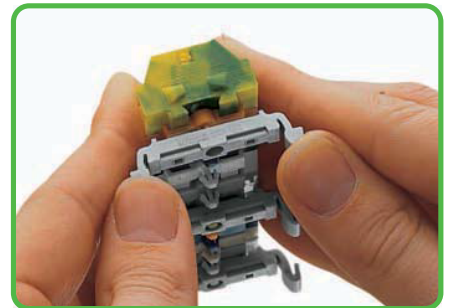


Terminal strip with snap-in mounting feet, connecting to 209-123 mounting adapter (The distance between mounting adapters should be 35 - 40 mm / 1.378 - 1.575 in max.).

Marking




Marking with self-adhesive marker strips.

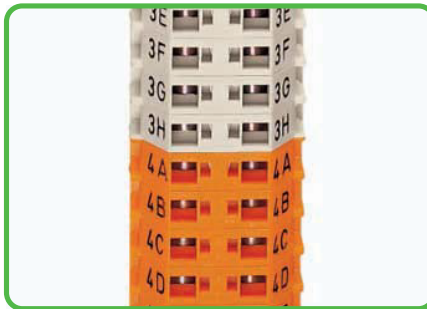

Marking by direct printing (on request).

Fixing

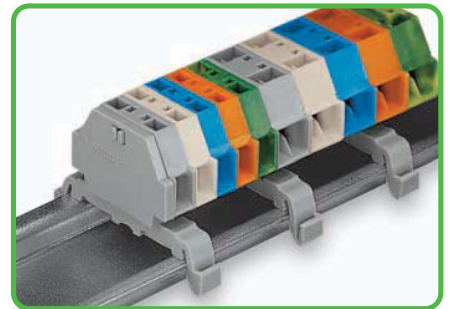

Terminal strip with snap-in mounting feet, on DIN 35 rail.



fine-stranded, tip-bonded



fine-stranded, with ferrule <sup>1</sup> (gaslight crimped)



fine-stranded, with pin terminal (gaslight crimped)

<sup>1</sup> When using ferruled conductors, it is necessary to use a terminal block one size larger than the nominal cross section of the wire.