


TOPJOB® Push-In Type Wire Jumpers Star Point Jumpers and Delta Jumpers


<p>Push-in type wire jumper</p> <p>I_N 16 A Conductor size 1.5 mm²</p>	<p>Star point jumper 800 V/8 kV/3 $I_N = I_N$ terminal block</p>	<p>Delta jumper 800 V/8 kV/3 $I_N = I_N$ terminal block</p>
---	--	---



Item No.	Pack. Unit	Item No.	Pack. Unit	Item No.	Pack. Unit
Push-in type wire jumper , insulated, conductor cross section 1.5 mm ² , suitable for 2001, 2002 and 2003 Series rail-mounted terminal blocks		Star point jumper , insulated, 1-3-5, light gray		Delta jumper , insulated, 1-2 3-4 5-6, light gray	
L = 60 mm	2009-412 100 (10x10)	○	2000-405/011-000	○	2000-406/020-000
L = 110 mm	2009-414 100 (10x10)	○	2001-405/011-000	○	2001-406/020-000
L = 250 mm	2009-416 100 (10x10)	○	2002-405/011-000	○	2002-406/020-000
		○	2004-405/011-000	○	2004-406/020-000
			100 (4x25)		100 (4x25)
		○	2006-405/011-000		
		○	2010-405/011-000		
		○	2016-405/011-000		
			50 (2x25)		

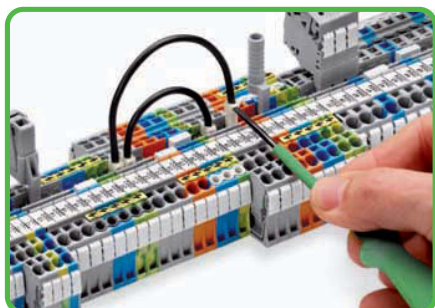

Push down the wire jumper until fully inserted. Lift the jumper with an operating tool for rewiring.

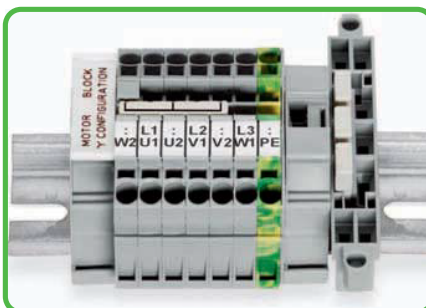

This jumper has been specially developed to create a "star point" and is used on motor terminal boards equipped with TOPJOB®S rail-mount terminal blocks.



This jumper has been specially developed to create a "delta" configuration and is used on motor terminal boards equipped with TOPJOB®S rail-mounted terminal blocks.