



# TOPJOB® Push-In Type Wire Jumpers Star Point Jumpers and Delta Jumpers


|   |  |   |
|---|--|---|
| <p><b>Push-in type wire jumper</b></p> <p><math>I_N</math> 16 A<br/>Conductor size 1.5 mm<sup>2</sup></p> | <p><b>Star point jumper</b><br/>800 V/8 kV/3<br/><math>I_N = I_N</math> terminal block</p> | <p><b>Delta jumper</b><br/>800 V/8 kV/3<br/><math>I_N = I_N</math> terminal block</p> |
|---|--|---|



| Item No.  | Pack. Unit                  | Item No.  | Pack. Unit              | Item No.   | Pack. Unit              |
|---|-----------------------------|---|-------------------------|--|-------------------------|
| <b>Push-in type wire jumper</b> , insulated, conductor cross section 1.5 mm <sup>2</sup> , suitable for 2001, 2002 and 2003 Series rail-mounted terminal blocks |                             | <b>Star point jumper</b> , insulated, 1-3-5, light gray |                         | <b>Delta jumper</b> , insulated, 1-2 3-4 5-6, light gray |                         |
| L = 60 mm   | <b>2009-412</b> 100 (10x10) | ○   | <b>2000-405/011-000</b> | ○  | <b>2000-406/020-000</b> |
| L = 110 mm  | <b>2009-414</b> 100 (10x10) | ○   | <b>2001-405/011-000</b> | ○  | <b>2001-406/020-000</b> |
| L = 250 mm  | <b>2009-416</b> 100 (10x10) | ○   | <b>2002-405/011-000</b> | ○  | <b>2002-406/020-000</b> |
|   |                             | ○   | <b>2004-405/011-000</b> | ○  | <b>2004-406/020-000</b> |
|   |                             |   | 100 (4x25)              |  | 100 (4x25)              |
|   |                             | ○   | <b>2006-405/011-000</b> |  |                         |
|   |                             | ○   | <b>2010-405/011-000</b> |  |                         |
|   |                             | ○   | <b>2016-405/011-000</b> |  |                         |
|   |                             |   | 50 (2x25)               |  |                         |

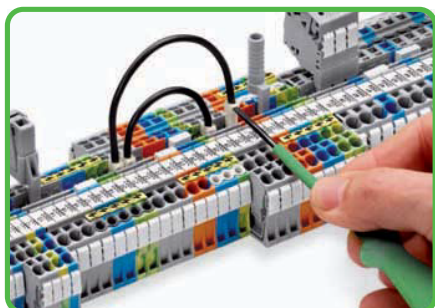

Push down the wire jumper until fully inserted. Lift the jumper with an operating tool for rewiring.

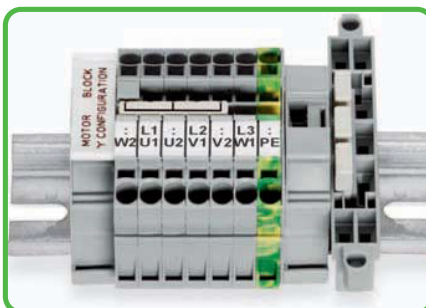

This jumper has been specially developed to create a "star point" and is used on motor terminal boards equipped with TOPJOB®S rail-mount terminal blocks.



This jumper has been specially developed to create a "delta" configuration and is used on motor terminal boards equipped with TOPJOB®S rail-mounted terminal blocks.