



# Double-Deck Disconnect Terminal Blocks with Movable Knife Disconnect

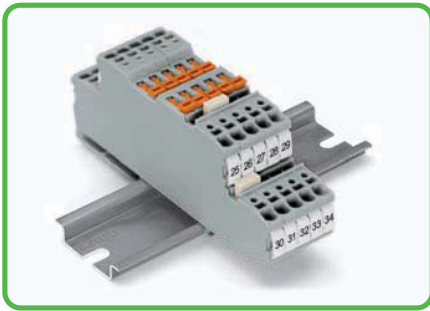


Terminal block assembly


- 1 Conductor sizes: 0.25 mm<sup>2</sup> - 4 mm<sup>2</sup> "s + f-st";  
Push-in conductor sizes: 0.75 mm<sup>2</sup> - 4 mm<sup>2</sup> "s"  
and 0.75 mm<sup>2</sup> - 2.5 mm<sup>2</sup>  
"insulated ferrules, 12 mm"
- 2 400 V = rated voltage  
6 kV = rated surge voltage  
3 = pollution degree  
(also see Section 14)
- 3 Strip length, see packaging or instructions.
- 4 See application notes for:  
Colored push-in type jumper bars, page 139  
Star point jumper, page 140  
Delta jumper, page 140  
Staggered jumper, page 141  
Adjacent jumper for continuous commoning,  
page 139  
Push-in type wire jumper, page 140  
TOPJOB®S connector, page 134  
TOPJOB®S L-type test plug module, page 136

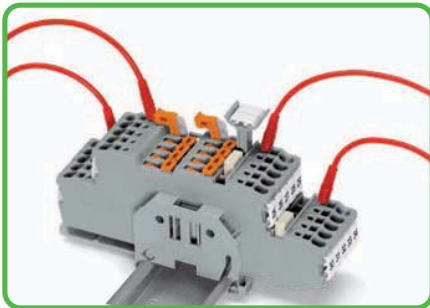


Testing with test plug 2 mm Ø.

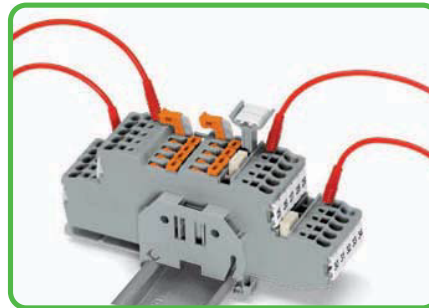

Group marker carrier accommodated in jumper contact slot.

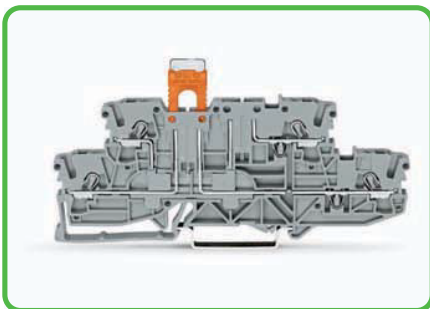

Carrier terminal block 2002-2961 with disconnect plug 2002-401 in parked position.

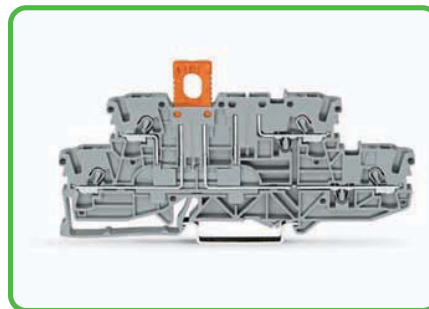

Carrier terminal block 2002-2961 with disconnect plug 2002-401 in operating position.

## Accessories

### WMB Multi marking system,

10 strips with 10 markers per card, stretchable 5 - 5.2 mm plain	<b>793-5501</b>	5
--	-----------------	---

### WMB Multi marking system, plain,

10 strips with 10 markers per card, stretchable 5 - 5.2 mm		
yellow	<b>793-5501/000-002</b>	
red	<b>793-5501/000-005</b>	
blue	<b>793-5501/000-006</b>	
gray	<b>793-5501/000-007</b>	
orange	<b>793-5501/000-012</b>	
light green	<b>793-5501/000-017</b>	
green	<b>793-5501/000-023</b>	
violet	<b>793-5501/000-024</b>	

### WMB Inline, plain,

stretchable 5 - 5.2 mm, 1,500 WMB markers, 5 mm, on roll white	<b>2009-115</b>	1
--	-----------------	---

### TOPJOB®S group marker carrier,


snap-on type for jumper slot, 5 mm wide		
gray	<b>2009-191</b>	50 (2x25)

### Screwless end stop,

for DIN 35 rail, 6 mm wide		
gray	<b>249-116</b>	100 (4x25)

### Screwless end stop,


for DIN 35 rail, 10 mm wide		
gray	<b>249-117</b>	50 (2x25)

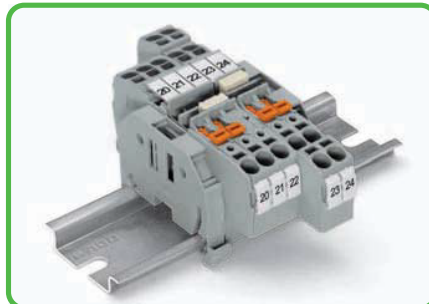



One center and two side marker slots for WMB markers or marking strips. Dual jumper slots, in the same position as the 2002 Series terminal blocks. Commoning options in front of or behind the knife disconnect, depending on the power supply direction.


- 1 Conductor sizes: 0.25 mm<sup>2</sup> – 4 mm<sup>2</sup> "s + f-st"; Push-in conductor sizes: 0.75 mm<sup>2</sup> – 4 mm<sup>2</sup> "s" and 0.75 mm<sup>2</sup> – 2.5 mm<sup>2</sup> "insulated ferrules, 12 mm"
- 2 400 V = rated voltage  
6 kV = rated surge voltage  
3 = pollution degree  
(also see Section 14)
- 3 Strip length, see packaging or instructions.
- 4 See application notes for:  
Colored push-in type jumper bars, page 139  
Staggered jumper, page 141  
Adjacent jumper for continuous commoning, page 139  
Push-in type wire jumper, page 140  
TOPJOB®S connector, page 134  
TOPJOB®S L-type test plug module, page 136


**Accessories**


<b>Test plug adapter,</b>	for test plug 4 mm Ø		
	gray	<b>2009-174</b>	100 (4x25)


<b>Testing tap,</b>	for max. 2.5 mm <sup>2</sup>		
	gray	<b>2009-182</b>	100 (4x25)

<b>Banana plug,</b>	for socket 4 mm Ø,		
	color mixed	<b>215-111</b>	50

<b>Double-deck marker carrier,</b>	pivoting		
	gray	<b>2002-121</b>	50 (2x25)


<b>WMB Multi marking system,</b>	10 strips with 10 markers per card,		
	stretchable 5 - 5.2 mm		
	plain	<b>793-5501</b>	5

<b>WMB Inline, plain,</b>	stretchable 5 - 5.2 mm,		
	1,500 WMB markers, 5 mm, on roll		
	white	<b>2009-115</b>	1


<b>Marking strip, plain,</b>	11 mm wide,		
	50 m roll		
	white	<b>2009-110</b>	1



Testing with test plug 2 mm Ø

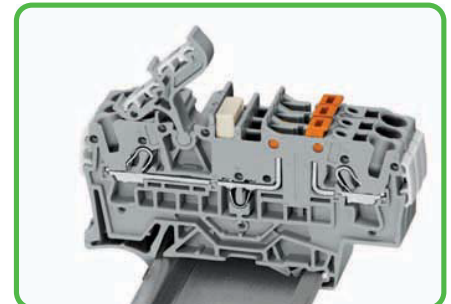

Additional marking option via pivoting marking adapter

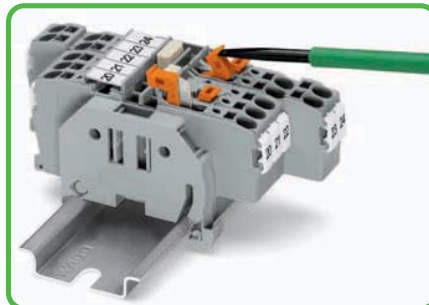

2- and 4-conductor disconnect terminal blocks for test and measurement  
Opening the knife disconnect.



2- and 4-conductor disconnect terminal blocks for test and measurement  
Closing the knife disconnect.



Carrier terminal block with disconnect plug in operating position.



Carrier terminal block with disconnect plug in parked position.