



| | |
|--|-------------|
| 0.25 - 2.5 (4) mm ² ① | AWG 22 - 12 |
| 500 V/6 kV/3 ② | 300 V, 20 A |
| I _N 24 A (28 A) | 600 V, 20 A |
| Terminal block width 5.2 mm / 0.205 in | |
| 10 - 12 mm / 0.43 in ③ | |



- ① Conductor sizes: 0.25 mm² - 4 mm² "s + f-st"; Push-in conductor sizes: 0.75 mm² - 4 mm² "s" and 0.75 mm² - 2.5 mm² "insulated ferrules, 12 mm"
- ② 500 V = rated voltage
6 kV = rated surge voltage
3 = pollution degree
(also see Section 14)
- ③ Strip length, see packaging or instructions.
- ④ Suitable for Ex i applications
- ⑤ Suitable for Ex e II applications
440 V, 19 A
Jumper 17 A
(also see Section 14)
- ⑥ See application notes for:
Colored push-in type jumper bars, page 139
Vertical jumper, page 142

| Item No. | Pack. Unit |
|--|------------|
| Shield/through/through terminal block, with marker carrier, gray housing | |
| ○ Shield/N/L 2002-3248 | 50 |
| ○ Shield/L/L 2002-3258 | 50 |
| Shield/through/through terminal block, without marker carrier, gray housing | |
| ○ Shield/N/L 2002-3218 | 50 |
| ○ Shield/L/L 2002-3228 | 50 |

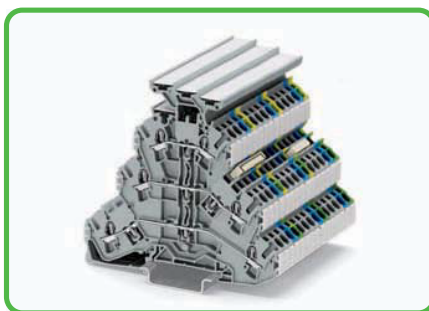

Triple-deck terminal block assembly



Combination of multilevel terminal blocks

2002 Series Accessories

Appropriate marking systems: WMB/Marking strips/WMB Inline (see Section 13)

End and intermediate plate, 0.8 mm thick

| | | |
|--------|-----------|------------|
| orange | 2002-3292 | 100 (4x25) |
| gray | 2002-3291 | 100 (4x25) |

Triple-deck marker carrier,

| | | |
|----------|----------|-----------|
| pivoting | | |
| gray | 2002-131 | 50 (2x25) |

Insulation stop,

| | | |
|---|----------|------------|
| 5 pcs/strip, 0.25 - 0.5 mm ² | | |
| light gray | 2002-171 | 200 (8x25) |

Insulation stop,

| | | |
|---------------------------------------|----------|------------|
| 5 pcs/strip, 0.75 - 1 mm ² | | |
| dark gray | 2002-172 | 200 (8x25) |

Push-in type jumper bar, insulated,

| | | |
|-----------------------------------|----------|------------|
| ⑥ I _N 25 A, light gray | | |
| 2-way | 2002-402 | 200 (8x25) |
| 3-way | 2002-403 | 200 (8x25) |
| 4-way | 2002-404 | 200 (8x25) |
| 5-way | 2002-405 | 100 (4x25) |
| 6-way | 2002-406 | 100 (4x25) |
| 7-way | 2002-407 | 100 (4x25) |
| 8-way | 2002-408 | 100 (4x25) |
| 9-way | 2002-409 | 100 (4x25) |
| 10-way | 2002-410 | 100 (4x25) |

Push-in type jumper bar, insulated,

| | | |
|---------------------------------|----------|------------|
| I _N 25 A, light gray | | |
| from 1 to 3 | 2002-433 | 200 (8x25) |
| from 1 to 4 | 2002-434 | 200 (8x25) |
| from 1 to 5 | 2002-435 | 100 (4x25) |
| from 1 to 6 | 2002-436 | 100 (4x25) |
| from 1 to 7 | 2002-437 | 100 (4x25) |
| from 1 to 8 | 2002-438 | 100 (4x25) |
| from 1 to 9 | 2002-439 | 100 (4x25) |
| from 1 to 10 | 2002-440 | 100 (4x25) |

Triple-deck vertical jumper, insulated,

| | | |
|-----------------------------------|----------|------------|
| ⑥ I _N 24 A, light gray | 2002-493 | 100 (4x25) |
|-----------------------------------|----------|------------|

Double-deck vertical jumper, insulated,

| | | |
|-----------------------------------|----------|------------|
| ⑥ I _N 24 A, light gray | 2002-492 | 100 (4x25) |
|-----------------------------------|----------|------------|