

Intruder Detection













Fig. 750 Series/Technical data see page 24/Delivered without miniature WSB markers
750/753 Series marking see pages 10 ... 11 / 12 ... 13

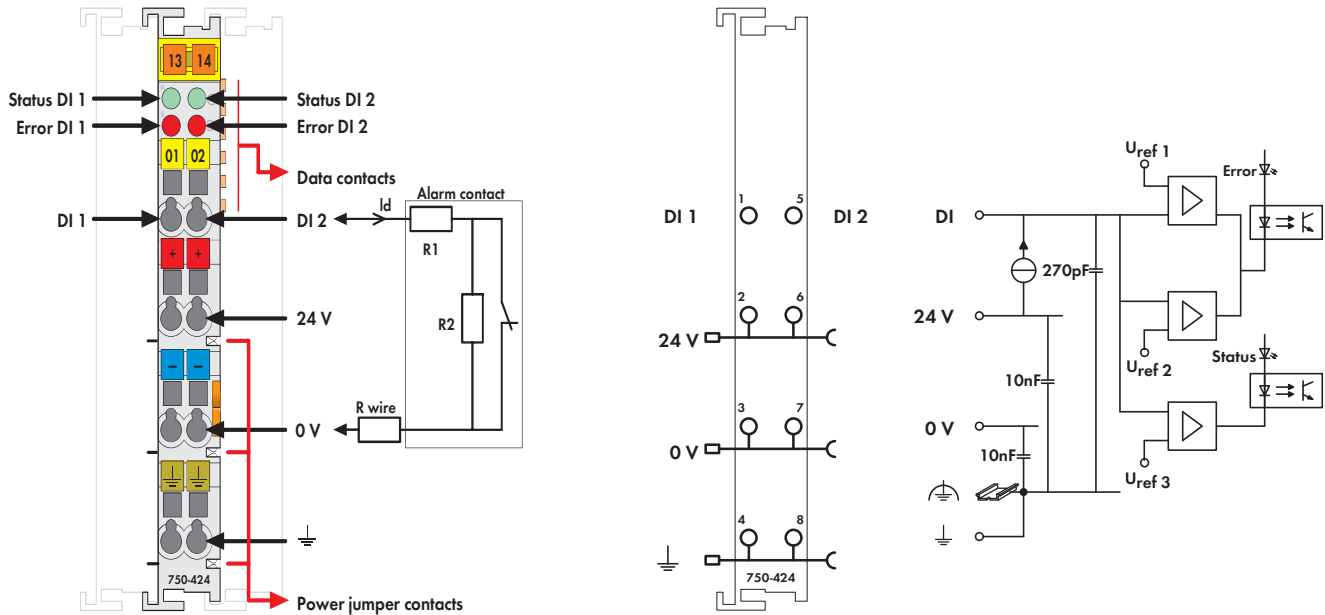This input module incorporates a current loop which makes it possible to monitor alarm contacts with a fixed resistance ratio (R1, R2), for intruder detection.

The module indicates the current status of the contact via LEDs and via status bits in the process image.

Description	Item No.	Pack. Unit
2DI 24V DC Intruder Detection	750-424	1
2DI 24V DC Intruder Detection (without connector)	753-424	1
Accessories		
 753 Series Connectors	753-110	25
 Coding elements	753-150	100
Miniature WSB Quick marking system		
 plain	248-501	5
 with marking	see pages 352 ... 353	
Approvals		
Also see "Approvals Overview" in Section 1		
Conformity marking	CE	
Shipbuilding	ABS, BV, DNV, GL, KR, LR*, NKK*, PRS*, RINA* *753 Series, pending	
 UL 508		
 ANSI/ISA 12.12.01	Class I, Div. 2, Grp. ABCD, T4	
 IEC 60079-0, -15	BR-Ex nA II T4	
 EN 60079-0, -15	I M2 / II 3 GD Ex nA IIC T4	
 EN 61241-0, -1		

Technical Data	
Number of inputs	2
Current consumption typ. (internal)	6 mA
Current consumption max. (field side)	16 mA / 24 V DC
Voltage via power jumper contacts	24 V DC (-25 % ... +30 %)
Loop current typ. (I _d)	1 mA
R1	1.5 kΩ (± 5 %)
R2	2.2 kΩ (± 5 %)
R wire (max.)	200 Ω
Isolation	500 V system/supply
Internal bit width	4 bits
Wire connection	CAGE CLAMP®
Cross sections	0.08 mm ² ... 2.5 mm ² / AWG 28 ... 14
Stripped lengths, 750/753 Series	8 ... 9 mm / 0.33 in 9 ... 10 mm / 0.37 in
Width	12 mm
Weight	36 g
EMC: CE - immunity to interference	acc. to EN 61000-6-2 (2005)
EMC: CE - emission of interference	acc. to EN 61000-6-4 (2007)
EMC: marine applications	
- immunity to interference	acc. to Germanischer Lloyd (2003)
EMC: marine applications	
- emission of interference	acc. to Germanischer Lloyd (2003)

2-Channel Digital Output Module 230 V AC/DC

with solid state relay 0.3 A

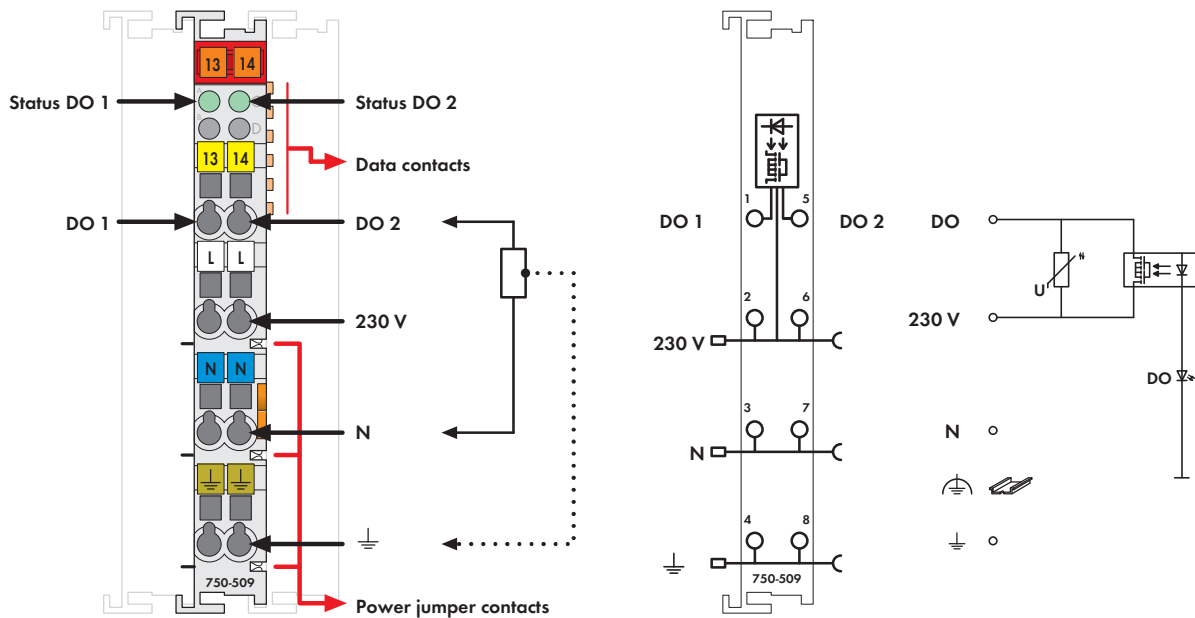


Fig. 750 Series/Technical data see page 24/Delivered without miniature WSB markers
750/753 Series marking see pages 10 ... 11 / 12 ... 13





The connected load is switched via the digital output (SSR) from the control system.

Notice:
An additional supply module must be added for operation with 230VAC/DC.

The semiconductor output is electrically isolated from the control side. Note that the power jumper contacts supply both "N" (common point) and switched output voltages.

The switched status of the outputs is shown by a LED.

The module is a 2-channel, 4-conductor device and actuators with a ground (earth) wire may be directly connected to the module.

Description	Item No.	Pack. Unit
2DO 230V AC 0.3A/SSR	750-509	1
2DO 230V AC 0.3A/SSR (without connector)	753-509	1
Accessories		
 753 Series Connectors	753-110	25
 Coding elements	753-150	100
Miniature WSB Quick marking system		
 plain	248-501	5
 with marking	see pages 352 ... 353	
Approvals Also see "Approvals Overview" in Section 1		
Conformity marking	CE	
Shipbuilding	ABS, BV, DNV, GL, KR, LR*, NKK*, PRS*, RINA* *753 Series, pending	
UL 508		
ANSI/ISA 12.12.01	Class I, Div. 2, Grp. ABCD, T4	
EN 60079-0, -15	I M2 / II 3 GD Ex nA IIC T4	
EN 61241-0, -1		

Technical Data	
No. of outputs	2
Current consumption (internal)	10 mA
Max. switching voltage	0 V ... 230 V AC/DC
Switching current	300 mA
Peak current	0.5 A (20 s); 1.5 A (0.1 s)
Max. switching frequency	5 Hz (24 V 0.3 A DF = 50 %); 0.5 Hz (230 V 0.3 A DF = 50 %)
Pull-in time (typ.)	4 ms
Pull-in time (max.)	10 ms
Drop-out time (typ.)	0.1 ms
Drop-out time (max.)	3 ms
R ON (typ.)	2.1 Ω
R ON (max.)	3.2 Ω
Overvoltage protection	275 V AC (varistor)
Isolation	1.5 kV eff. (field/system)*; * 2.5 kV rated surge voltage; Overvoltage category III
Internal bit width	2 bits
Wire connection	CAGE CLAMP®
Cross sections	0.08 mm² ... 2.5 mm² / AWG 28 ... 14
Stripped lengths, 750/753 Series	8 ... 9 mm / 0.33 in 9 ... 10 mm / 0.37 in
Width	12 mm
Weight	54.5 g
EMC: CE - immunity to interference	acc. to EN 60000-6-2 (2005)
EMC: CE - emission of interference	acc. to EN 61000-6-4 (2007)
EMC: marine applications	
- immunity to interference	acc. to Germanischer Lloyd (2003)
EMC: marine applications	
- emission of interference	acc. to Germanischer Lloyd (2003)