




linect

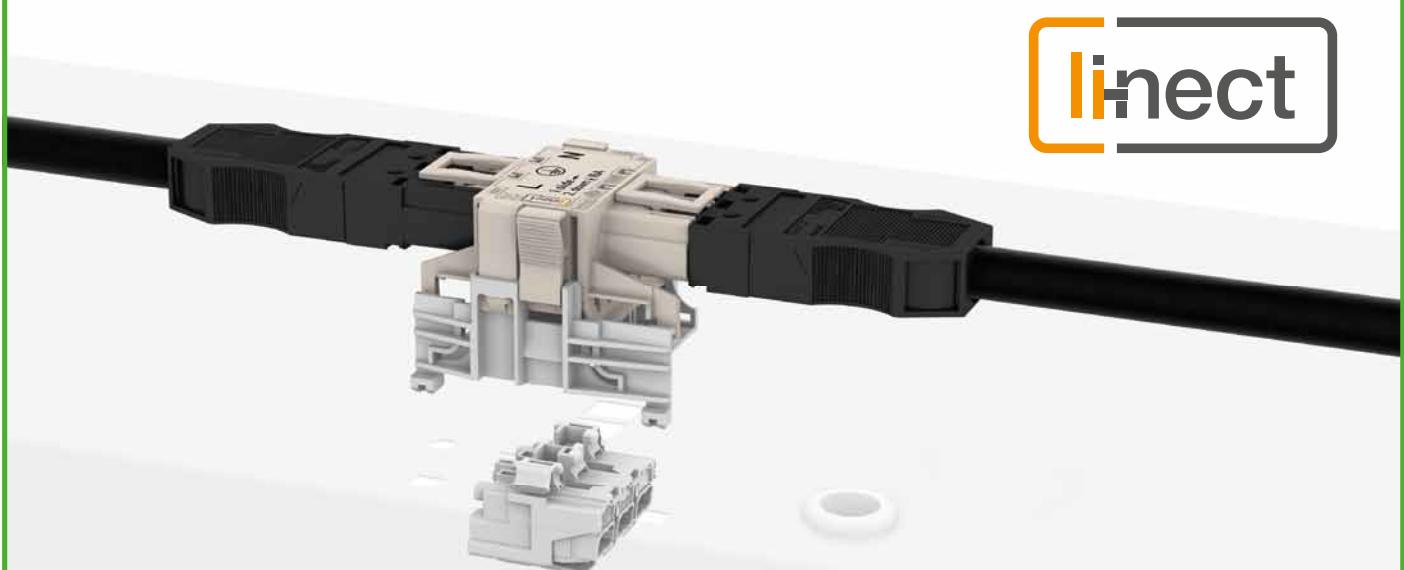

3

Note:

- Installation connectors are designed for connection and disconnection while not under load.
- There is no hazard-inducing interchangeability with other systems based on IEC 60309, IEC 60320, IEC 60906 and with national connector and socket systems.
- Compliance with the standards (IEC 61535) does not guarantee hazard-avoiding, non-interchangeability with installation connector systems from various manufacturers.
- Installation connector systems are not a substitute for residential connector/socket systems.

- WINSTA® MIDI connectors are not suitable for easy-to-reach areas, except IP 2XD compliant specialty products (see pages 99 to 101).

**770 Series**

- Linect® T-Connector, 2-Pole**
Linect® T-Connector, 3-Pole
Linect® T-Connector, 4-Pole
Linect® T-Connector, 5-Pole

60, 66
60, 84
61, 110
61, 124

**770 Series**

- Pluggable Connectors, 2-Pole**
Pluggable Connectors, 3-Pole
Pluggable Connectors, 4-Pole
Pluggable Connectors, 5-Pole

62 – 63
74 – 75, 80 – 81
102 – 103
114 – 117

**770 Series**

- Strain Relief Housings, 2-Pole**
Strain Relief Housings, 3-pole
Strain Relief Housings, 4-Pole
Strain Relief Housings, 5-pole
Strain Relief Housings, 6-Pole
Strain Relief Housings, 7-Pole

64
76 – 77
104
118 – 119
140
141

**770 Series**

- Snap-In Device Connectors, 2-Pole**
Snap-In Device Connectors, 3-Pole
Snap-In Device Connectors, 4-Pole
Snap-In Device Connectors, 5-Pole

65
78 – 79
106 – 107
120 – 121

**770 Series**

- PCB Connectors, 3-Pole**
PCB Connectors, 4-Pole
PCB Connectors, 5-Pole

82 – 83
108 – 109
122 – 123

**770 Series**

- Distribution Connectors, 2-Pole**
Intermediate Couplers and T-Distribution Connectors, 3-Pole
Distribution Connectors, 4-Pole
Intermediate Couplers and T-Distribution Connectors, 5-Pole
Distribution Box

67
84 – 88
110 – 111
124 – 128
138 – 139

**771 Series**

- Cable Assemblies, 2-Pole**
Cable Assemblies, 3-Pole
Cable Assemblies, 4-Pole
Cable Assemblies, 5-Pole

68 – 73
90 – 97
112
129 – 137

**770/771 Series**

- Strain Relief Housings, IP 2XD, 3-Pole**
Cable Assemblies, IP 2XD, 3-Pole

99
100 – 101

	PVC halogen-free	H05VV-F 2x2.5 H05Z1Z1-F 2x2.5	
	250 V/4 kV/3 I _N 20 A		
	Conductor ends, bonded: 9 mm		
	① Approvals		
Interconnecting cable, socket – plug	Length black	Item No. white	Item No. black
			Item No. white
	● Coding L	PVC	halogen-free
	1 m	771-8982/007-103 .../007-104	771-8982/017-103 .../017-104
	2 m	771-8982/007-203 .../007-204	771-8982/017-203 .../017-204
	3 m	771-8982/007-303 .../007-304	771-8982/017-303 .../017-304
	5 m	771-8982/007-503 .../007-504	771-8982/017-503 .../017-504
	7 m	771-8982/007-703 .../007-704	771-8982/017-703 .../017-704
Connecting cable, socket – free end	Length black	Item No. white	Item No. black
			Item No. white
	● Coding L	PVC	halogen-free
	1 m	771-8982/107-103 .../107-104	771-8982/117-103 .../117-104
	2 m	771-8982/107-203 .../107-204	771-8982/117-203 .../117-204
	3 m	771-8982/107-303 .../107-304	771-8982/117-303 .../117-304
	5 m	771-8982/107-503 .../107-504	771-8982/117-503 .../117-504
	7 m	771-8982/107-703 .../107-704	771-8982/117-703 .../117-704
Connecting cable, plug - free end	Length black	Item No. white	Item No. black
			Item No. white
	● Coding L	PVC	halogen-free
	1 m	771-8982/207-103 .../207-104	771-8982/217-103 .../217-104
	2 m	771-8982/207-203 .../207-204	771-8982/217-203 .../217-204
	3 m	771-8982/207-303 .../207-304	771-8982/217-303 .../217-304
	5 m	771-8982/207-503 .../207-504	771-8982/217-503 .../217-504
	7 m	771-8982/207-703 .../207-704	771-8982/217-703 .../217-704
	Accessories		
	Locking lever, for "flying leads,"		
	manually operated		
	black	770-101	100 (4x25)
	white	770-121	100 (4x25)
	Locking lever, for "flying leads,"		
	tool operated		
	black	770-111	100 (4x25)
	white	770-131	100 (4x25)
	Lockout cap, for socket, separable, 12-pole		
	black	770-201	100
	white	770-221	100
	Lockout cap, for plug, separable, 5-pole		
	yellow	770-360	100