

linect

3

Note:

- Installation connectors are designed for connection and disconnection while not under load.
- There is no hazard-inducing interchangeability with other systems based on IEC 60309, IEC 60320, IEC 60906 and with national connector and socket systems.
- Compliance with the standards (IEC 61535) does not guarantee hazard-avoiding, non-interchangeability with installation connector systems from various manufacturers.
- Installation connector systems are not a substitute for residential connector/socket systems.
- WINSTA® MIDI connectors are not suitable for easy-to-reach areas, except IP 2XD compliant specialty products (see pages 99 to 101).

3



770 Series

Linect® T-Connector, 2-Pole	60, 66
Linect® T-Connector, 3-Pole	60, 84
Linect® T-Connector, 4-Pole	61, 110
Linect® T-Connector, 5-Pole	61, 124



770 Series

Pluggable Connectors, 2-Pole	62 - 63
Pluggable Connectors, 3-Pole	74 - 75, 80 - 81
Pluggable Connectors, 4-Pole	102 - 103
Pluggable Connectors, 5-Pole	114 - 117



770 Series

Strain Relief Housings, 2-Pole	64
Strain Relief Housings, 3-pole	76 - 77
Strain Relief Housings, 4-Pole	104
Strain Relief Housings, 5-pole	118 - 119
Strain Relief Housings, 6-Pole	140
Strain Relief Housings, 7-Pole	141



770 Series

Snap-In Device Connectors, 2-Pole	65
Snap-In Device Connectors, 3-Pole	78 - 79
Snap-In Device Connectors, 4-Pole	106 - 107
Snap-In Device Connectors, 5-Pole	120 - 121



770 Series

PCB Connectors, 3-Pole	82 - 83
PCB Connectors, 4-Pole	108 - 109
PCB Connectors, 5-Pole	122 - 123



770 Series

Distribution Connectors, 2-Pole	67
Intermediate Couplers and T-Distribution Connectors, 3-Pole	84 - 88
Distribution Connectors, 4-Pole	110 - 111
Intermediate Couplers and T-Distribution Connectors, 5-Pole	124 - 128
Distribution Box	138 - 139




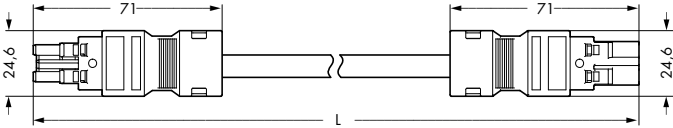

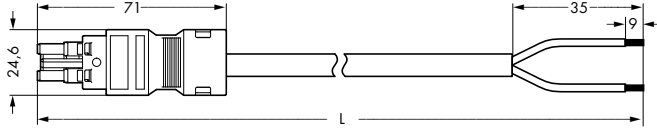

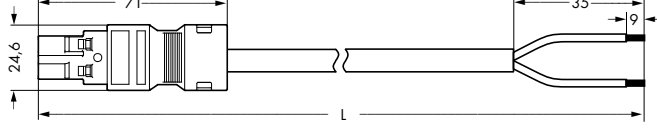




771 Series

Cable Assemblies, 2-Pole	68 - 73
Cable Assemblies, 3-Pole	90 - 97
Cable Assemblies, 4-Pole	112
Cable Assemblies, 5-Pole	129 - 137



770/771 Series

Strain Relief Housings, IP 2XD, 3-Pole	99
Cable Assemblies, IP 2XD, 3-Pole	100 - 101

		PVC H05VV-F 2x2.5 halogen-free H05Z1Z1-F 2x2.5 250 V/4 kV/3 I _N 20 A Conductor ends, bonded: 9 mm ① Approvals				
Interconnecting cable, socket – plug		Length	Item No. black	Item No. white	Item No. black	Item No. white
		● Coding L	PVC halogen-free			
		1 m	771-8982/007-103	.../007-104	771-8982/017-103	.../017-104
		2 m	771-8982/007-203	.../007-204	771-8982/017-203	.../017-204
		3 m	771-8982/007-303	.../007-304	771-8982/017-303	.../017-304
		5 m	771-8982/007-503	.../007-504	771-8982/017-503	.../017-504
		7 m	771-8982/007-703	.../007-704	771-8982/017-703	.../017-704
Connecting cable, socket – free end		Length	Item No. black	Item No. white	Item No. black	Item No. white
		● Coding L	PVC halogen-free			
		1 m	771-8982/107-103	.../107-104	771-8982/117-103	.../117-104
		2 m	771-8982/107-203	.../107-204	771-8982/117-203	.../117-204
		3 m	771-8982/107-303	.../107-304	771-8982/117-303	.../117-304
		5 m	771-8982/107-503	.../107-504	771-8982/117-503	.../117-504
		7 m	771-8982/107-703	.../107-704	771-8982/117-703	.../117-704
Connecting cable, plug – free end		Length	Item No. black	Item No. white	Item No. black	Item No. white
		● Coding L	PVC halogen-free			
		1 m	771-8982/207-103	.../207-104	771-8982/217-103	.../217-104
		2 m	771-8982/207-203	.../207-204	771-8982/217-203	.../217-204
		3 m	771-8982/207-303	.../207-304	771-8982/217-303	.../217-304
		5 m	771-8982/207-503	.../207-504	771-8982/217-503	.../217-504
		7 m	771-8982/207-703	.../207-704	771-8982/217-703	.../217-704
		Accessories				
		Locking lever, for "flying leads,"				
		manually operated				
		black	770-101	100 (4x25)		
		white	770-121	100 (4x25)		
		Locking lever, for "flying leads,"				
		tool operated				
		black	770-111	100 (4x25)		
		white	770-131	100 (4x25)		
		Lockout cap, for socket, separable, 12-pole				
		black	770-201	100		
		white	770-221	100		
		Lockout cap, for plug, separable, 5-pole				
		yellow	770-360	100		