




linect

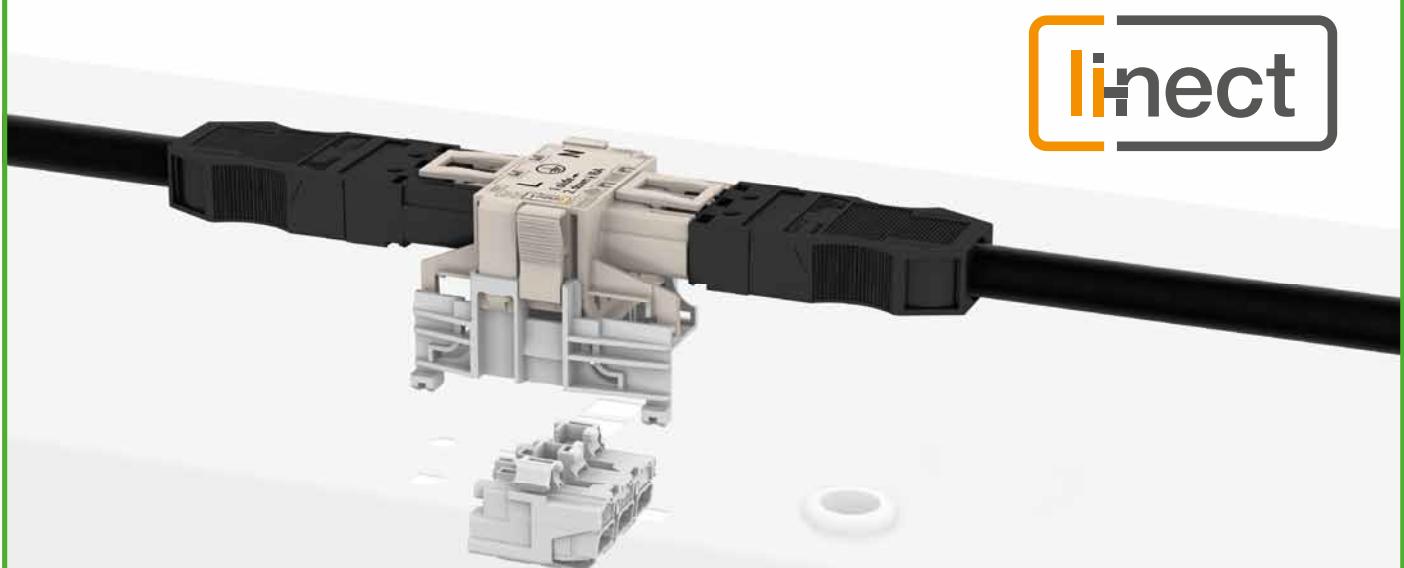

3

Note:

- Installation connectors are designed for connection and disconnection while not under load.
- There is no hazard-inducing interchangeability with other systems based on IEC 60309, IEC 60320, IEC 60906 and with national connector and socket systems.
- Compliance with the standards (IEC 61535) does not guarantee hazard-avoiding, non-interchangeability with installation connector systems from various manufacturers.
- Installation connector systems are not a substitute for residential connector/socket systems.

- WINSTA® MIDI connectors are not suitable for easy-to-reach areas, except IP 2XD compliant specialty products (see pages 99 to 101).

**770 Series**

- Linect® T-Connector, 2-Pole**
Linect® T-Connector, 3-Pole
Linect® T-Connector, 4-Pole
Linect® T-Connector, 5-Pole

60, 66
60, 84
61, 110
61, 124

**770 Series**

- Pluggable Connectors, 2-Pole**
Pluggable Connectors, 3-Pole
Pluggable Connectors, 4-Pole
Pluggable Connectors, 5-Pole

62 – 63
74 – 75, 80 – 81
102 – 103
114 – 117

**770 Series**

- Strain Relief Housings, 2-Pole**
Strain Relief Housings, 3-pole
Strain Relief Housings, 4-Pole
Strain Relief Housings, 5-pole
Strain Relief Housings, 6-Pole
Strain Relief Housings, 7-Pole

64
76 – 77
104
118 – 119
140
141

**770 Series**

- Snap-In Device Connectors, 2-Pole**
Snap-In Device Connectors, 3-Pole
Snap-In Device Connectors, 4-Pole
Snap-In Device Connectors, 5-Pole

65
78 – 79
106 – 107
120 – 121

**770 Series**

- PCB Connectors, 3-Pole**
PCB Connectors, 4-Pole
PCB Connectors, 5-Pole

82 – 83
108 – 109
122 – 123

**770 Series**

- Distribution Connectors, 2-Pole**
Intermediate Couplers and T-Distribution Connectors, 3-Pole
Distribution Connectors, 4-Pole
Intermediate Couplers and T-Distribution Connectors, 5-Pole
Distribution Box

67
84 – 88
110 – 111
124 – 128
138 – 139

**771 Series**

- Cable Assemblies, 2-Pole**
Cable Assemblies, 3-Pole
Cable Assemblies, 4-Pole
Cable Assemblies, 5-Pole

68 – 73
90 – 97
112
129 – 137

**770/771 Series**

- Strain Relief Housings, IP 2XD, 3-Pole**
Cable Assemblies, IP 2XD, 3-Pole

99
100 – 101

Strain Relief Housings, 3-Pole, for Different Cable Diameters

	<p>Snap-on type strain relief housings for:</p> <ul style="list-style-type: none"> - 3-pole sockets - 3-pole plugs <p>① Approvals</p>	<p>Snap-on type strain relief housings for:</p> <ul style="list-style-type: none"> - 3-pole sockets - 3-pole plugs <p>① Approvals</p>
--	---	---



Description	Color	Item No.	Pack. Unit	Color	Item No.	Pack. Unit
Strain relief housings, 3-pole		Strain relief housing, for 2 cables, 4.5 – 8 mm diameter ②			Strain relief housing, for 2 cables, 8 – 11.5 mm diameter ②	
	black	770-503/023-000	50	black	770-503	50
	white	770-513/023-000	50	white	770-513	50

Item-Specific Accessories

	Marking strip, self-adhesive, on DIN A4 carrier card, 182 mm long, Strip height: 6 mm 210-333100 Marking area: 48 x 6.5 mm	Marking strip, self-adhesive, on DIN A4 carrier card, 182 mm long, Strip height: 6 mm 210-333 100 Marking area: 48 x 6.5 mm
	Shield connecting plate, for sockets and plugs, for 2 cables, 4 – 7.5 mm diameter 770-523 25	
Info	Dimensions	

① For "International Certification Organizations" and "Approvals – User Guide," see pages 240 to 243.

② For H05VV and NYM cables

For other cables, please contact factory.

Fire load data available upon request.

