

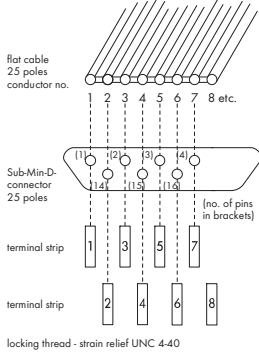


| | | |
|--|---|---|
| | <p>Interface module with D-subminiature male connector, for mating connectors with solder connection, mating direction vertical</p> <p>Mounting carrier for DIN 35 rail</p> | <p>Interface module with D-subminiature male connector, for mating connectors with IDC, mating direction vertical</p> <p>Mounting carrier for DIN 35 rail</p> |
|--|---|---|



289-440 to 289-444



| Description | No. of Poles | Width | Item No. | Pack. Unit | No. of Poles | Width | Item No. | Pack. Unit |
|------------------|--------------|-------|----------------|------------|--------------|-------|----------------|------------|
| Interface module | 9 | 38 | 289-445 | 1 | 9 | 38 | 289-440 | 1 |
| | 15 | 53.5 | 289-446 | 1 | 15 | 53.5 | 289-441 | 1 |
| | 25 | 79 | 289-447 | 1 | 25 | 79 | 289-442 | 1 |
| | 37 | 120 | 289-448 | 1 | 37 | 120 | 289-443 | 1 |
| | 50 | 157 | 289-449 | 1 | 50 | 157 | 289-444 | 1 |

| Technical Data | | | |
|---|--|--|--|
| Operating voltage | 125 V AC / DC | | 125 V AC / DC |
| Nominal current | 1 A | | 1 A |
| Connector contact | plating, 0.5 µm ... 0.8 µm Au over 2 µm Ni | | plating, 0.5 µm ... 0.8 µm Au over 2 µm Ni |
| Contact resistance | ≤ 3 mΩ | | ≤ 3 mΩ |
| Performance level | 2 / 200 mating cycles | | 2 / 200 mating cycles |
| Nominal voltage acc. to VDE 0110 Part 1/4.97, IEC 60664-1 | 50 V / 0.8 kV / 2 | | 50 V / 0.8 kV / 2 |
| Ambient operating temperature | -20 °C ... +50 °C | | -20 °C ... +50 °C |
| Storage temperature | -40 °C ... +70 °C | | -40 °C ... +70 °C |
| Dimensions (mm) W x H x L incl. mounting feet or mounting carrier | W x 19 x 63,5 | | W x 19 x 63,5 |
| Wire connection | Height from upper-edge of DIN 35 rail CAGE CLAMP® (WAGO 236 Series) | | Height from upper-edge of DIN 35 rail CAGE CLAMP® (WAGO 236 Series) |
| Cross sections | 0.08 mm² ... 2.5 mm² / AWG 28 ... 12 | | 0.08 mm² ... 2.5 mm² / AWG 28 ... 12 |
| Stripped lengths | 5 ... 6 mm / 0.22 in | | 5 ... 6 mm / 0.22 in |