

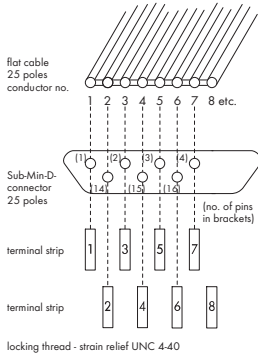


	<p>Interface module with D-subminiature male connector, for mating connectors with solder connection, mating direction vertical</p> <p>Mounting carrier for DIN 35 rail</p>	<p>Interface module with D-subminiature male connector, for mating connectors with IDC, mating direction vertical</p> <p>Mounting carrier for DIN 35 rail</p>
--	---	---



289-440 to 289-444



Description	No. of Poles	Width	Item No.	Pack. Unit	No. of Poles	Width	Item No.	Pack. Unit
Interface module	9	38	289-445	1	9	38	289-440	1
	15	53.5	289-446	1	15	53.5	289-441	1
	25	79	289-447	1	25	79	289-442	1
	37	120	289-448	1	37	120	289-443	1
	50	157	289-449	1	50	157	289-444	1

Technical Data

Operating voltage	125 V AC / DC	125 V AC / DC
Nominal current	1 A	1 A
Connector contact	plating, 0.5 µm ... 0.8 µm Au over 2 µm Ni	plating, 0.5 µm ... 0.8 µm Au over 2 µm Ni
Contact resistance	≤ 3 mΩ	≤ 3 mΩ
Performance level	2 / 200 mating cycles	2 / 200 mating cycles
Nominal voltage acc. to VDE 0110 Part 1/4.97, IEC 60664-1	50 V / 0.8 kV / 2	50 V / 0.8 kV / 2
Ambient operating temperature	-20 °C ... +50 °C	-20 °C ... +50 °C
Storage temperature	-40 °C ... +70 °C	-40 °C ... +70 °C
Dimensions (mm) W x H x L incl. mounting feet or mounting carrier	W x 19 x 63,5	W x 19 x 63,5
Wire connection	Height from upper-edge of DIN 35 rail CAGE CLAMP® (WAGO 236 Series)	Height from upper-edge of DIN 35 rail CAGE CLAMP® (WAGO 236 Series)
Cross sections	0.08 mm² ... 2.5 mm² / AWG 28 ... 12	0.08 mm² ... 2.5 mm² / AWG 28 ... 12
Stripped lengths	5 ... 6 mm / 0.22 in	5 ... 6 mm / 0.22 in