








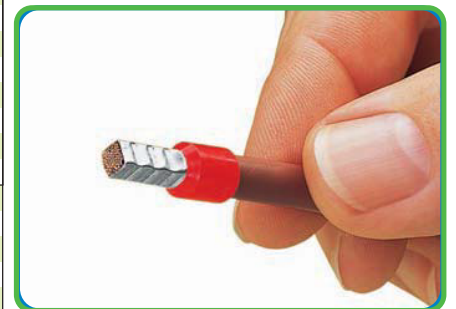
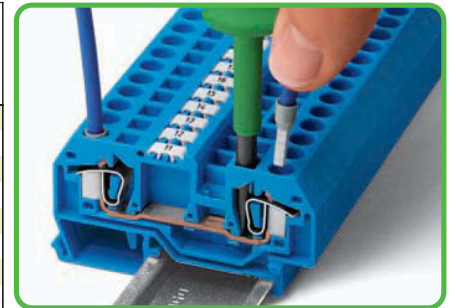


**Application notes:**

- With "Variocrimp 4," the built-in crimping pressure control automatically adjusts force to the conductor cross section used. With "Variocrimp 16," it is necessary to select the wire gauge on the tool before crimping.
- Only one crimping station is needed to handle the specified conductor size range.
- Uniform compact crimping from all four sides for high conductor retention.
- No need to center the conductor into the ferrule.
- Conductor and ferrule insertion possible from both sides (for left- and right-handers).
- Built-in ratchet mechanism ensures gastight crimp connection.
- Crimping tools open automatically after crimping operation is complete.
- Comfortable handles for operator.

Ferrules		Technical Data	
	sleeve for 1 mm <sup>2</sup> /AWG 18, 10 mm strip length, L: 14 mm, L1: 8 mm, D: 3.6 mm, D1: 3 mm, D2: 1.5 mm red <b>216-203</b> 1000		sleeve for 6 mm <sup>2</sup> /AWG 10, 14 mm strip length, L: 20 mm, L1: 12 mm, D: 6.8 mm, D1: 6.2 mm, D2: 3.5 mm yellow <b>216-208</b> 100
	sleeve for 1.5 mm <sup>2</sup> /AWG 16, 8 mm strip length, L: 12 mm, L1: 6 mm, D: 4 mm, D1: 3.4 mm, D2: 1.8 mm black <b>216-224</b> 1000		sleeve for 10 mm <sup>2</sup> /AWG 8, 16 mm strip length, L: 21 mm, L1: 12 mm, D: 8.1 mm, D1: 7.5 mm, D2: 4.6 mm red <b>216-209</b> 100
	sleeve for 1.5 mm <sup>2</sup> /AWG 16, 10 mm strip length, L: 14 mm, L1: 8 mm, D: 4 mm, D1: 3.4 mm, D2: 1.8 mm black <b>216-204</b> 1000		sleeve for 16 mm <sup>2</sup> /AWG 6, 23 mm strip length, L: 29 mm, L1: 18 mm, D: 9.6 mm, D1: 8.8 mm, D2: 5.8 mm blue <b>216-210</b> 100
	sleeve for 2.08 mm <sup>2</sup> /AWG 14, 10 mm strip length, L: 14.5 mm, L1: 8 mm, D: 4.2 mm, D1: 3.6 mm, D2: 2.05 mm yellow <b>216-205</b> 1000		
	sleeve for 2.5 mm <sup>2</sup> /AWG 14, 10 mm strip length, L: 15 mm, L1: 8 mm, D: 4.8 mm, D1: 4.2 mm, D2: 2.3 mm blue <b>216-206</b> 1000		
	sleeve for 4 mm <sup>2</sup> /AWG 12, 12 mm strip length, L: 16.8 mm, L1: 9.5 mm, D: 5.4 mm, D1: 4.8 mm, D2: 2.9 mm gray <b>216-207</b> 1000		



A perfect gastight crimp, both electrically and mechanically reliable.