

3

- Note:**
- Installation connectors are designed for connection and disconnection while not under load.
 - There is no hazard-inducing interchangeability with other systems based on IEC 60309, IEC 60320, IEC 60906 and with national connector and socket systems.
 - Compliance with the standards (IEC 61535) does not guarantee hazard-avoiding, non-interchangeability with installation connector systems from various manufacturers.
 - Installation connector systems are not a substitute for residential connector/socket systems.
 - WINSTA® MIDI connectors are not suitable for easy-to-reach areas, except IP 2XD compliant specialty products (see pages 99 to 101).

3



770 Series

- Linect® T-Connector, 2-Pole
- Linect® T-Connector, 3-Pole
- Linect® T-Connector, 4-Pole
- Linect® T-Connector, 5-Pole

60, 66
60, 84
61, 110
61, 124



770 Series

- Pluggable Connectors, 2-Pole
- Pluggable Connectors, 3-Pole
- Pluggable Connectors, 4-Pole
- Pluggable Connectors, 5-Pole

62 - 63
74 - 75, 80 - 81
102 - 103
114 - 117



770 Series

- Strain Relief Housings, 2-Pole
- Strain Relief Housings, 3-pole
- Strain Relief Housings, 4-Pole
- Strain Relief Housings, 5-pole
- Strain Relief Housings, 6-Pole
- Strain Relief Housings, 7-Pole

64
76 - 77
104
118 - 119
140
141



770 Series

- Snap-In Device Connectors, 2-Pole
- Snap-In Device Connectors, 3-Pole
- Snap-In Device Connectors, 4-Pole
- Snap-In Device Connectors, 5-Pole

65
78 - 79
106 - 107
120 - 121



770 Series

- PCB Connectors, 3-Pole
- PCB Connectors, 4-Pole
- PCB Connectors, 5-Pole

82 - 83
108 - 109
122 - 123



770 Series

- Distribution Connectors, 2-Pole
- Intermediate Couplers and T-Distribution Connectors, 3-Pole
- Distribution Connectors, 4-Pole
- Intermediate Couplers and T-Distribution Connectors, 5-Pole
- Distribution Box

67
84 - 88
110 - 111
124 - 128
138 - 139



771 Series

- Cable Assemblies, 2-Pole
- Cable Assemblies, 3-Pole
- Cable Assemblies, 4-Pole
- Cable Assemblies, 5-Pole

68 - 73
90 - 97
112
129 - 137






770/771 Series

- Strain Relief Housings, IP 2XD, 3-Pole
- Cable Assemblies, IP 2XD, 3-Pole

99
100 - 101

	250 V/4 kV/3 I_N 25 A (16 A) ① ② Approvals	250 V/4 kV/3 I_N 25 A (16 A) ① ② Approvals
--	--	--

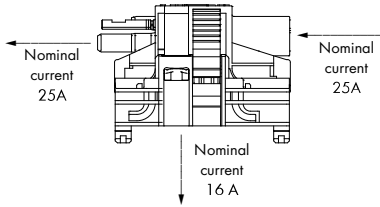

① Nominal current

Description	Color	Item No.	Pack. Unit	Color	Item No.	Pack. Unit
Linect® T-connector		Linect® T-connector, 2-pole, socket - plug, white housing, dark gray cover			linect® T-connector, 3-pole, socket - plug, white housing, white cover	
	● dark gray	770-7502	25	○ white	770-6223	25
		Suitable for 294-8022 lighting connector			Suitable for 294-8013 and 294-8113 lighting connectors	

Item-Specific Accessories						
		Lockout cap, for socket, separable, 12-pole			Lockout cap, for socket, separable, 12-pole	
		black 770-201 100 white 770-221 100			black 770-201 100 white 770-221 100	
		Lockout cap, for plug, separable, 5-pole			Lockout cap, for plug, separable, 5-pole	
		yellow 770-360 100			yellow 770-360 100	
					Coding pin, for plug (A and B coding)	
					gray 770-401 100	
Info	Dimensions					

② For "International Certification Organizations" and "Approvals - User Guide," see pages 240 to 243.

- 2-pole
 - dark gray Coding L (L' N')
- 3-pole
 - white Coding A (L ⊕ N)
- 4-pole
 - white Coding A (N 3 2/L 1/L')
- 5-pole
 - white Coding A (N 3 L1 L2 L3)
 - blue Coding I, (N ⊕ L DA- DA+)
 - dark gray Coding L (N 3 L N' L')

For coding information, see pages 224 to 226.
Fire load data available upon request.

