

3

- Note:**
- Installation connectors are designed for connection and disconnection while not under load.
 - There is no hazard-inducing interchangeability with other systems based on IEC 60309, IEC 60320, IEC 60906 and with national connector and socket systems.
 - Compliance with the standards (IEC 61535) does not guarantee hazard-avoiding, non-interchangeability with installation connector systems from various manufacturers.
 - Installation connector systems are not a substitute for residential connector/socket systems.
 - WINSTA® MIDI connectors are not suitable for easy-to-reach areas, except IP 2XD compliant specialty products (see pages 99 to 101).

3



770 Series

- Linect® T-Connector, 2-Pole
- Linect® T-Connector, 3-Pole
- Linect® T-Connector, 4-Pole
- Linect® T-Connector, 5-Pole

60, 66
60, 84
61, 110
61, 124



770 Series

- Pluggable Connectors, 2-Pole
- Pluggable Connectors, 3-Pole
- Pluggable Connectors, 4-Pole
- Pluggable Connectors, 5-Pole

62 - 63
74 - 75, 80 - 81
102 - 103
114 - 117



770 Series

- Strain Relief Housings, 2-Pole
- Strain Relief Housings, 3-pole
- Strain Relief Housings, 4-Pole
- Strain Relief Housings, 5-pole
- Strain Relief Housings, 6-Pole
- Strain Relief Housings, 7-Pole

64
76 - 77
104
118 - 119
140
141



770 Series

- Snap-In Device Connectors, 2-Pole
- Snap-In Device Connectors, 3-Pole
- Snap-In Device Connectors, 4-Pole
- Snap-In Device Connectors, 5-Pole

65
78 - 79
106 - 107
120 - 121



770 Series

- PCB Connectors, 3-Pole
- PCB Connectors, 4-Pole
- PCB Connectors, 5-Pole

82 - 83
108 - 109
122 - 123



770 Series

- Distribution Connectors, 2-Pole
- Intermediate Couplers and T-Distribution Connectors, 3-Pole
- Distribution Connectors, 4-Pole
- Intermediate Couplers and T-Distribution Connectors, 5-Pole
- Distribution Box

67
84 - 88
110 - 111
124 - 128
138 - 139



771 Series

- Cable Assemblies, 2-Pole
- Cable Assemblies, 3-Pole
- Cable Assemblies, 4-Pole
- Cable Assemblies, 5-Pole

68 - 73
90 - 97
112
129 - 137








770/771 Series



- Strain Relief Housings, IP 2XD, 3-Pole
- Cable Assemblies, IP 2XD, 3-Pole

99
100 - 101

	400 V/6 kV/3 I_N 25 A (16 A) ① ② Approvals	400 V/6 kV/3 I_N 25 A ② Approvals
--	--	---



Description	Color	Item No.	Pack. Unit	Color	Item No.	Pack. Unit	
Linect® T-connectors		Linect® T-connector ③, 5-pole,			T-distribution connector , 1 x plug / 2 x socket		
T-distribution connectors		socket - plug		● black	770-621	50	
Intermediate couplers		White housing, white cover		○ white	770-671	50	
		○ white	770-6225	25	● blue	770-617	50
		White housing, blue cover ④		● red	770-921	50	
		● blue	770-7105	20	for "flying leads," with 3rd locking lever		
		White housing, dark gray cover		● black	770-622	50	
		● dark gray	770-7505	20	○ white	770-672	50
				● blue	770-620	50	
				● red	770-922	50	
Item-Specific Accessories							
		Lockout cap , for socket, separable, 12-pole			Lockout cap , for socket, separable, 12-pole		
							
		black	770-201	100	black	770-201	100
		white	770-221	100	white	770-221	100
		Lockout cap , for plug, separable, 5-pole			Lockout cap , for plug, separable, 5-pole		
							
		yellow	770-360	100	yellow	770-360	100
Info	Dimensions						

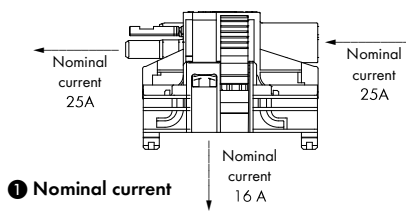

- ② For "International Certification Organizations" and "Approvals - User Guide," see pages 240 to 243.
 - ③ For suitable lighting connectors, see page 61
 - ④ Connectors for DALI applications
 - ⑤ One locking lever for each intermediate coupler is included.
- | | | |
|-------------|----------|-----------------|
| ● black | Coding A | (N 3 L1 L2 L3) |
| ○ white | Coding A | (N 3 L1 L2 L3) |
| ● blue | Coding I | (N ⊕ L DA- DA+) |
| ● dark gray | Coding L | (N 3 L N' L') |
| ● red | Coding P | (N 3 L1 L2 L3) |
- For coding information, see pages 224 to 226.
Fire load data available upon request.

