M12 *HARAX*® A-coded

HARTING®

Mating face

4   3
1   2

A-coding
Mating face
acc. to IEC 61076-2-101

RoHS

Applications / Advantages

• Actor and sensor applications

• Shielded and unshielded versions

• Available with crimp resp. *HARAX*® rapid termination, or as overmoulded system cable in various lengths
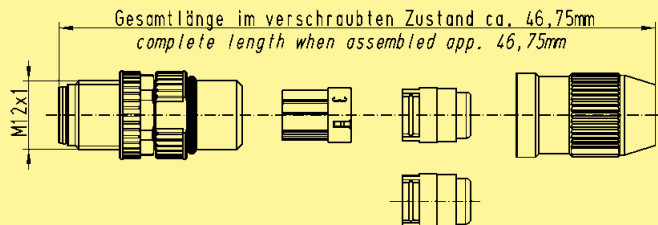
• Robust design, quick assembly

Identification	Part No.	Drawing	Dimensions in mm
HARAX® M12-S			
Male straight version 4 poles, 0.14 - 0.34 mm²	21 03 111 1405	Gesamtlänge im verschraubten Zustand ca. 46,75mm *complete length when assembled app. 46,75mm* M12x1	
Male straight version 4 poles, 0.25 - 0.5 mm²	21 03 112 1405	Gesamtlänge im verschraubten Zustand ca.54,8mm *complete length when assembled app.54,8mm* M12x1 M12x1 SW13 width across flats 13 Ø14,7	

Further information and data sheets see www.HARTING.com