

U.I. Lapp GmbH	PRODUCT INFORMATION	
	EPIC® H-A 3 TG	14.11.2013

Innovative metal and plastic housing design
Housing in plastic or metal version. For power supply in the smallest possible space



Industrial machinery and plant engineering



Mechanical resistance



Robust



Waterproof



Info

Compact, robust plastic housings size H-A 3

Application range

Machine and equipment manufacturing
Control engineering
Electronic laboratory

Product features

Hood
Bolts for single lever
Straight cable entry
Versions with / without cable gland

Remark

Photographs are not to scale and do not represent detailed images of the respective products.


Technical Data


Material:	Housing: grey thermoplastic, black Lever: zinc-plated steel
Protection rating:	IP 65 (latched)
Temperature range:	-40 °C to +100 °C, short-term up to +125 °C
VDE-tested:	Certified production control: VDE-REG. no.: B437 UL-tested: UL File Number: E75770

Product Management	Document: LAPP_PRO125867EN.pdf	1 / 3
--------------------	--------------------------------	-------



Part number	Article	M	PG	Material	Colour	Cable gland	Cable clamping range	Dimensions incl. cable gland	Pieces / PU
10425500	H-A 3 Tgv		11	Thermoplastic	black				10
10426000	H-A 3 Tgv		11	Thermoplastic	grey				10
10426700	H-A 3 Tgv		11	Thermoplastic	black	yes	6,5 - 12	62	10
10426400	H-A 3 Tgv		11	Thermoplastic	grey	yes	6,5 - 12	62	10
19425500	H-A 3 Tgv M20	20		Thermoplastic	black				10
19426000	H-A 3 Tgv M20	20		Thermoplastic	grey				10

U.I. Lapp GmbH	PRODUCT INFORMATION	
	EPIC® H-A 3 TG	14.11.2013

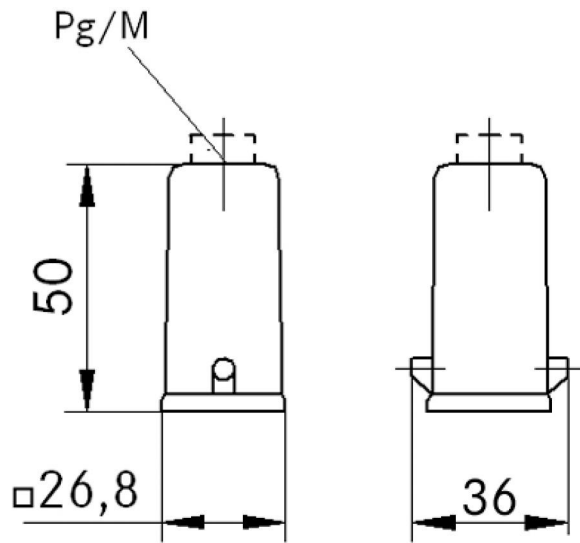

Product Management	Document: LAPP_PRO125867EN.pdf	3 / 3
--------------------	--------------------------------	-------