


TECHNICAL SPECIFICATION • HALOGEN-FREE - NARROW SLOT GREY

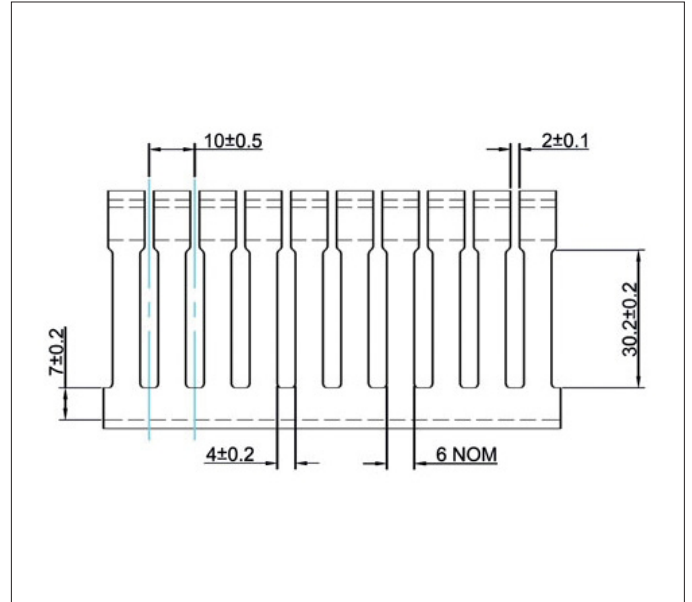

DESCRIPTION

Halogen-free Betaduct is manufactured in the UK from Noryl NH5110E and is available in narrow slot. Made from material which forms a protective charred "intumescent" surface layer and being free from Halogen, this Betaduct does not emit harmful products such as Hydrochloric acid and Chloride gas, which is associated with PVC. It provides a lightweight cable trunking with excellent rigidity and performance characteristics. Recommended fixing method; Betaduct rivets and washers.

APPLICATION

Ideal for use in applications where danger to members of the public is a concern such as public buildings, shopping centre's, hospitals, airport terminals, stadiums, as well as a variety of hostile environments.



SPECIFICATION

Material:	Halogen-Free Noryl NH5110E
Colour Options:	Light Grey (RAL 7035)
Service Temperature Range:	-25°C to +90°C
Oxygen Index:	35.7% BS EN ISO 4589-2: 1999
Smoke Test	BS 6853: 1999 Annex D.8.3 - Small-scale smoke emission test.
Flammability:	UL94 V-1 Rated Material
Standards:	CE, RoHS, UL E161178B & Lloyds Register Approved.

PART NUMBERS & SIZES

PART NO. HF GREY NARROW SLOT	NOMINAL SIZE INNER (WxH) mm	PACK QTY (METRES)
20470032	37.5 x 37.5	24
20470033	37.5 x 50	16
20470034	37.5 x 75	16
20470053	50 x 50	16
20470054	50 x 75	16
20470073	75 x 50	16
20470074	75 x 75	16
20470103	100 x 50	8
20470104	100 x 75	8

TECHNICAL SPECIFICATION • HALOGEN-FREE - NARROW SLOT GREY

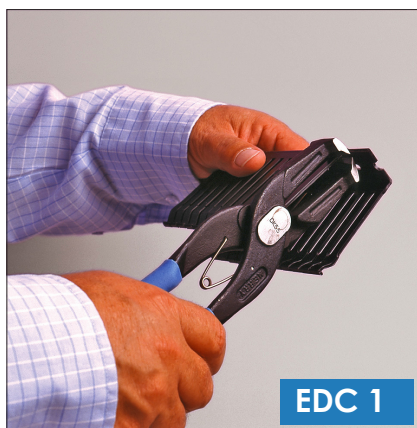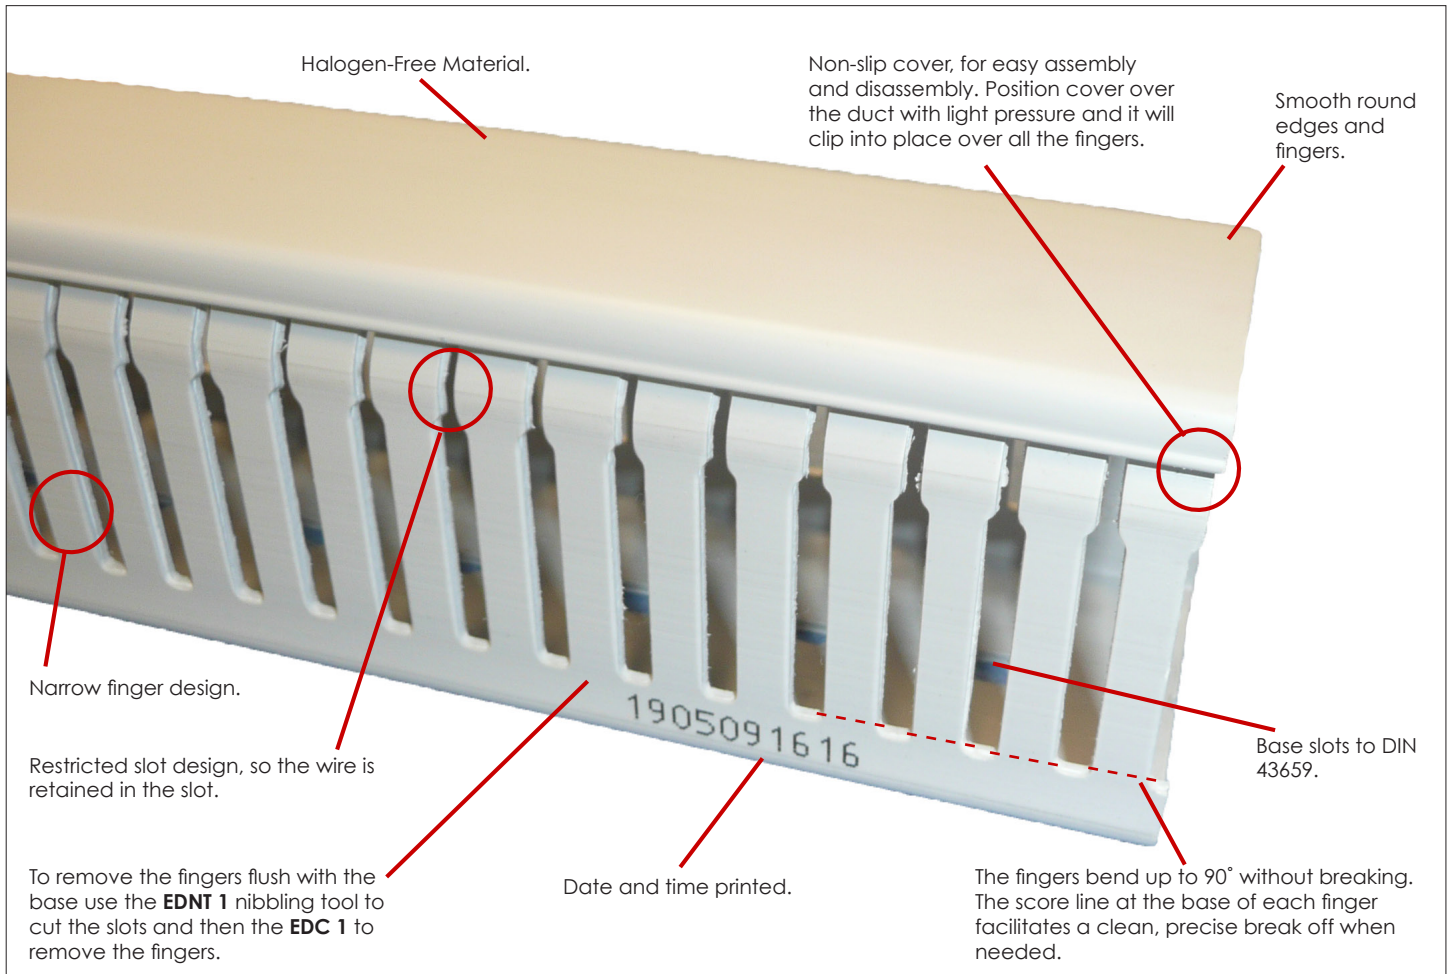

FEATURES	BENEFITS
UL Approved Halogen-Free Material	<i>Ideal for use in applications where danger to members of the public is a concern.</i>
Narrow finger design	<i>Provides closer spacing for use with high density applications.</i>
Restricted slot design	<i>Saves time during installation, once wires are installed they will remain in the slot with or without cover.</i>
Base slots to DIN 43659	<i>Staggered mounting holes, conforms to DIN Standard.</i>
Non-slip cover	<i>Once installed lid will not slip. Easy clip-on assembly and disassembly.</i>
Score line at base of each slot	<i>To facilitate a clean, precise break off.</i>
Smooth round edges	<i>Free from burrs or sharp edges that could lead to abrasions on hands and cables.</i>
Associated cutting tools: EDNT 1, EDC 1.	<i>For clean, precise cutting of trunking fingers.</i>

BETADUCT CAPACITY CHART

TRUNKING SIZE Width x Height mm	CROSS SECTIONAL AREA mm ²	AT 55% PACKING DENSITY mm ²	CABLE CROSS SECTIONAL AREA (mm ²) TRI-RATED CABLE BS6231													
			0.50	0.75	1.00	1.50	2.50	4.00	6.00	10.00	16.00	25.00	35.00	50.00	70.00	95.00
			2.7	2.9	3.1	3.4	3.8	4.4	5.1	6.8	8.64	10.16	11.46	13.97	16.46	18.54
			CABLE DIAMETER (mm)													
MAXIMUM NUMBER OF CABLES																
15 x 15	225	123.75	21	18	16	13	10	8	6	3	2	1	-	-	-	-
19 x 50	950	522.5	91	79	69	57	46	34	25	14	8	6	5	3	2	1
25 x 20	500	275	48	41	36	30	24	18	13	7	4	3	2	1	1	1
25 x 37.5	937.5	515.6	90	78	68	56	45	33	25	14	8	6	4	3	2	1
25 x 50	1250	687.5	120	104	91	75	60	45	33	18	11	8	6	4	3	2
25 x 75	1875	1031.25	180	156	136	113	90	67	50	28	17	12	9	6	4	3
25 x 100	2500	1375	240	208	182	151	121	90	67	37	23	16	13	8	6	5
37.5 x 37.5	1406	773.3	135	117	102	85	68	50	37	21	13	9	7	5	3	2
37.5 x 50	1875	1031.25	180	156	136	113	90	67	50	28	17	12	9	6	4	3
37.5 x 75	2813	1547.15	270	234	204	170	136	101	75	42	26	19	14	10	7	5
37.5 x 100	3750	2062.5	360	312	273	227	181	135	100	56	35	25	19	13	9	7
50 x 25	1250	687.5	120	104	91	75	60	45	33	18	11	8	6	4	3	2
50 x 37.5	1875	1031.25	180	156	136	113	90	67	50	28	17	12	9	6	4	3
50 x 50	2500	1375	240	208	182	151	121	90	67	37	23	16	13	8	6	5
50 x 75	3750	2062.5	360	312	273	227	181	135	100	56	35	25	19	13	9	7
50 x 100	5000	2750	480	416	364	303	242	180	134	75	46	33	26	17	12	10
75 x 37.5	2813	1547.15	270	234	204	170	136	101	75	42	26	19	14	10	7	5
75 x 50	3750	2062.5	360	312	273	273	181	135	100	56	35	25	19	13	9	7
75 x 75	5625	3093.75	540	468	409	410	272	203	151	85	52	38	29	20	14	11
75 x 100	7500	4125	720	624	546	547	363	271	201	113	70	50	39	26	19	15
100 x 50	5000	2750	480	416	364	364	242	180	134	75	46	33	26	17	12	10
100 x 75	7500	4125	720	624	546	454	363	271	201	113	70	50	39	26	19	15
100 x 100	10000	5500	960	832	728	605	484	361	269	151	93	67	53	35	25	20
100 x 125	12500	6875	1200	1040	910	757	606	452	336	189	117	84	66	44	32	25
125 x 75	9375	5156.25	900	780	683	567	454	339	252	141	87	63	49	33	24	19