


Standard Cable Gland

For Standard Applications



MATERIAL: Black Polyamide 6.6
White Polyamide 6.6
Seal: Nitrile Rubber

Nr	a	b	Ø		c	d	e	Box	Sealing Washer Dichtungswa. / Dichtungswa. (Pg)	Locknut Gummiring / Gummiring
			Max.	Min.						
248	M16	10.0	6.0	4.0	25.0	22.0	19.0	100	96	92
250	M16	10.0	10.0	7.0	25.0	22.0	19.0	100	96	92
249	M20	11.0	6.0	4.0	25.0	25.0	19.0	100	97	93
251	M20	11.0	10.0	7.0	25.0	25.0	19.0	100	97	93
252	M20	11.0	13.0	8.0	30.5	26.0	23.0	100	97	93
264	M25	12.0	6.0	4.0	25.0	31.5	19.0	100	98	94
265	M25	12.0	10.0	7.0	25.0	31.5	19.0	100	98	94
253	M25	12.0	13.0	8.0	30.5	31.5	23.0	100	98	94
254	M25	12.0	18.0	12.0	32.5	32.0	28.0	100	98	94
255	M32	13.0	24.0	18.0	35.0	41.0	36.0	100	99	95
256	M16	20.0	6.0	4.0	25.0	22.0	19.0	100	96	92
258	M16	20.0	10.0	7.0	25.0	22.0	19.0	100	96	92
257	M20	20.0	6.0	4.0	25.0	25.0	19.0	100	97	93
259	M20	20.0	10.0	7.0	25.0	25.0	19.0	100	97	93
260	M20	20.0	13.0	8.0	30.5	26.0	23.0	100	97	93
266	M25	20.0	6.0	4.0	25.0	31.5	19.0	100	98	94
267	M25	20.0	10.0	7.0	25.0	31.5	19.0	100	98	94
261	M25	20.0	13.0	8.0	30.5	31.5	23.0	100	98	94
262	M25	20.0	18.0	12.0	32.5	32.0	28.0	100	98	94
263	M32	20.0	24.0	18.0	35.0	41.0	36.0	100	99	95
1585	Pg9	8.0	6.0	4.0	25.0	22.0	19.0	100	249-001	LNPG9
1586	Pg9	8.0	10.0	7.0	25.0	22.0	19.0	100	249-001	LNPG9
1587	Pg11	8.0	6.0	4.0	25.0	25.0	19.0	100	249-002	LNPG11
1588	Pg11	8.0	10.0	7.0	25.0	25.0	19.0	100	249-002	LNPG11
1589	Pg13.5	8.0	6.0	4.0	25.0	25.0	19.0	100	249-003	LNPG13.5
1590	Pg13.5	8.0	10.0	7.0	25.0	25.0	19.0	100	249-003	LNPG13.5
1591	Pg13.5	8.0	13.0	8.0	30.5	26.0	23.0	100	249-003	LNPG13.5
1592	Pg16	8.0	6.0	4.0	25.0	25.0	19.0	100	249-004	LNPG16
1593	Pg16	8.0	10.0	7.0	25.0	25.0	19.0	100	249-004	LNPG16
1594	Pg16	8.0	13.0	8.0	30.5	26.0	23.0	100	249-004	LNPG16
1595	Pg21	11.0	18.0	12.0	32.5	32.0	28.0	100	249-005	LNPG21

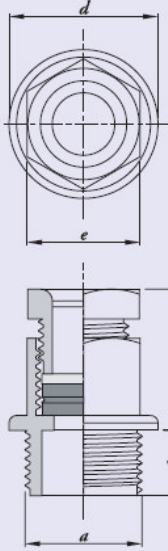

With Twin Hole Bush

	248T-B	M16	10.0	2.5 x 3mm	25.0	22.0	19.0	100	96	92
	256T-B	M16	20.0	2.5 x 3mm	25.0	22.0	19.0	100	96	92
	249T-B	M20	11.0	2.5 x 3mm	25.0	25.0	19.0	100	97	93
	257T-B	M20	20.0	2.5 x 3mm	25.0	25.0	19.0	100	97	93

Key Features

- Ideal for general use.
 - IP66 Protection.
 - Metric and Pg versions.
 - Also available in London Underground (LUL) approved materials for LSF/LFH applications.
- Elkay's Standard Cable gland gives good all-round performance and is the corner stone of Elkay's diverse cable gland range. Cable Glands can be supplied assembled with Locknuts and Sealing Washers as required. Please contact sales office for details. Available in a variety of colours. Special colours available to order.