


MCI16066R5

MILD STEEL IP PROTECTED ICT RACK



H	1600
W	600
D	600
Weight (kg)	68
Part No.	MCI16066R5
EAN	8713574129412

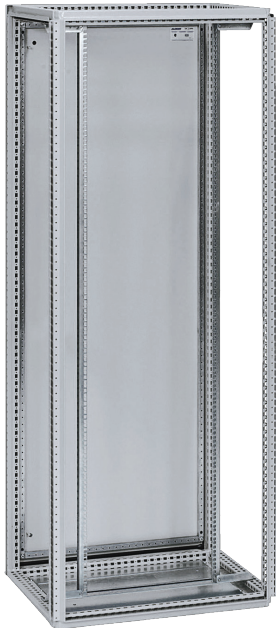

IP 56, NEMA 4, 12, 13. IK 10

The IP protected ICT Rack based on the MultiFlex range. Suitable as a standalone version with integrated cooling or to be used in the more harsh environments e.g. workshops.

Can be equipped with all the standard accessories of the MultiFlex range including many options for up-flow and cross-flow ventilation.

Material: Frame 1.5/1.75mm steel plate. 19" profiles and door 2mm steel plate. Roof plate: 1.35mm steel plate. Bottom plates: 1mm galvanized steel.

Frame: Seam welded reversed open profiles with 25mm hole pattern according to DIN 43660. Including integrated external hole pattern.

Rear door: Mounted with hinges allowing left or right hand opening. Including door frame with 25mm hole pattern.

Side panels: Supplied as an accessory.

Roof panel: Removable

Lock: Espagnolette 4-point locking system. Standard double-bit lock with 3mm pin. Can be exchanged for standard inserts or Euro-cylinder and swing handle.

Bottom plates: Consists of three or four (D>600) pieces.

19" profiles: Provides front and side universal punchings.

Earthing: All panels are earthed through their fittings and are equipped with a separate earthing stud.

Finish: Frame and roof plates: RAL 7035 structured powder coating. 19" profiles: zinc plated steel.

Protection: Complies with IP 56, Nema 4, 12 & 13 when front door and side panels are fitted. IK 10.

Delivery: Frame with fitted rear door, roof panel, bottom plates. 19" profiles at front and fixing brackets CIB. Delivery also includes earthing bolts. Delivered on a pallet with identical width of the enclosure to allow combining without removal. All packing material is recyclable.

Mounting requirement: Add side panels for closed sides. Front frame can be covered with FFC or fitted with a glazed or plain door.