


## XZCC43FCP40B

female, DIN 43650 A, 4-pin, elbowed connector - cable gland Pg 11

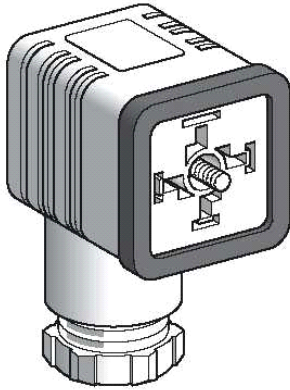

### Main

|                                    |  |
|------------------------------------|--|
| Accessory / separate part category | Cabling accessories  |
| Accessory / separate part type     | Connector  |
| Electrical connection              | Elbowed female connector DIN 43650 A, 4 pins                                     |
| Status LED                         | Without  |
| Cable connection                   | Screw terminal / wire size $\leq 1.5 \text{ mm}^2$ / clamping capacity 7...10 mm |

### Complementary

|                                |                           |
|--------------------------------|---------------------------|
| Cable gland type               | Pg 11                     |
| Cable connector fixing         | Locking screw             |
| [Ue] rated operational voltage | 250 V AC                  |
| [In] rated current             | 16 A                      |
| Enclosure material             | Plastic                   |
| Insulating resistance          | $> 0.1 \text{ G}\Omega$   |
| Contact resistance             | $\leq 4000 \mu\text{Ohm}$ |
| Product weight                 | 0.035 kg                  |

### Environment

|                                       |              |
|---------------------------------------|--------------|
| IP degree of protection               | IP65         |
| Ambient air temperature for operation | -40...125 °C |

### Offer Sustainability

|                          |   |
|--------------------------|---|
| Sustainable offer status | Not Green Premium product   |
| RoHS                     | Compliant - since 0726 - Schneider Electric declaration of conformity |

The information provided in this documentation contains general descriptions and/or technical characteristics of the products contained herein. This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications. It is the duty of any such user or integrator to perform the appropriate and complete risk analysis, evaluation and testing of the products with respect to the relevant specific application or use thereof. Neither Schneider Electric Industries SAS nor any of its affiliates or subsidiaries shall be responsible or liable for misuse of the information contained herein.