

GST18i 6 Pole Connectors - Ask the following questions:-

Male or Female?



Male



Female

Males have a solid metal pin when you look down the 'barrels'
 Females have power on them so you would expect to find them on LCM's and power distribution boxes
 Males would be found on devices i.e. mounted on a light fitting (or on a lead connected to the fitting)

Colour Configuration



Blk/Blue



Blk/Grey




Blk/White

Different colours have different keying/coding eg. a blk/blue will not plug into a blk/grey!




Grey VS White
 Take care - the grey is very pale
 Blk/Gry is far more common than Blk/White

Style of Hood

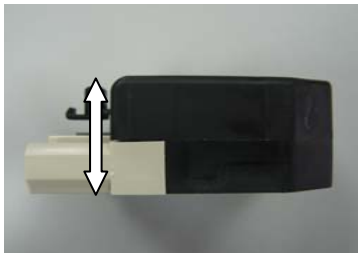

Standard Hood
 (25.2mm)

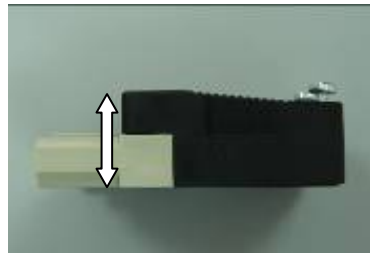


Low Profile Hood
 (21mm)

Standard strain relief for 8.5-10.5mm OD cable or larger strain relief for 10-12mm OD Cables
 Low profile hoods available for more compact applications


Style of Locking



Female Locking

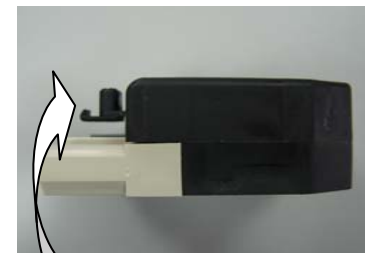

Male Locking

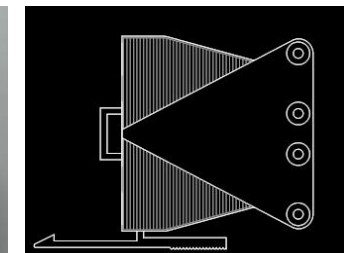

Side Latch

Standard MALE LOCKING has a latch on the front of the lid
 Standard FEMALE LOCKING has rectangular loops on the front of the lid
 A special side latching lid is also available

Male GST18i 6 pole connectors with strain relief						
Part Number	Old Part Number	Colour/Coding	Locking	Cable Entry	Hood Profile	
34.362.0200.0	WS.032.6666.0	Black/White	Male Locking	8.5-10.5mm		
* 34.362.0201.1	WS.032.6666.1N	Black/Grey	No Locking	8.5-10.5mm	Low	
34.362.0211.1	WS.032.6666.1PN	Black/Grey	No Locking	8.5-10.5mm		
34.362.2201.1	WS.034.6666.1N	Black/Grey	No Locking	10-12mm		
* 34.362.0200.1	WS.032.6666.1	Black/Grey	Male Locking	8.5-10.5mm		
34.362.0210.1	-	Black/Grey	Male Locking	8.5-10.5mm		Low
34.362.2200.1	WS.034.6666.1	Black/Grey	Male Locking	10-12mm		
34.362.2202.1		Black/Grey	Side Locking			
34.362.0201.2	WS.032.6666.2N	Black/Blue	No Locking	8.5-10.5mm	Low	
34.362.0211.2	-	Black/Blue	No Locking	8.5-10.5mm		
34.362.0200.2	WS.032.6666.2	Black/Blue	Male Locking	8.5-10.5mm		
34.362.0210.2	-	Black/Blue	Male Locking	8.5-10.5mm	Low	
34.362.2200.2	WS.034.6666.2	Black/Blue	Male Locking	10-12mm		
34.362.2202.2		Black/Blue	Side Locking			

* = common version

Female GST18i 6 pole connectors with strain relief						
Part Number	Old Part Number	Colour/Coding	Locking	Cable Entry	Hood Profile	
34.361.0200.0	WS.031.6666.0	Black/White	Male Locking	8.5-10.5mm		
34.361.2200.0	-	Black/White	Male Locking	10-12mm		
34.361.0100.0	WS.031.6666.0F	Black/White	Female Locking	8.5-10.5mm		
* 34.361.0201.1	WS.031.6666.1N	Black/Grey	No Locking	8.5-10.5mm	Low	
34.361.2201.1	WS.033.6666.1N	Black/Grey	No Locking	10-12mm		
34.361.0200.1	WS.031.6666.1	Black/Grey	Male Locking	8.5-10.5mm		
34.361.2200.1	WS.033.6666.1	Black/Grey	Male Locking	10-12mm		
34.361.0100.1	WS.031.6666.1F	Black/Grey	Female Locking	8.5-10.5mm		
34.361.0110.1	-	Black/Grey	Female Locking	8.5-10.5mm		
34.361.2100.1	WS.033.6666.1F	Black/Grey	Female Locking	10-12mm		
34.361.0201.2	WS.031.6666.2N	Black/Blue	No Locking	8.5-10.5mm		
34.361.2200.2	-	Black/Blue	Male Locking	10-12mm		
34.361.0100.2	-	Black/Blue	Female Locking	8.5-10.5mm		
34.361.0110.2	-	Black/Blue	Female Locking	8.5-10.5mm	Low	
34.361.2100.2	WS.033.6666.2	Black/Blue	Female Locking	10-12mm	Low	

* = common version