


MICROSERIES MRS 24Vdc 1CO

Weidmüller Interface GmbH & Co. KG
 Klingenbergstraße 16
 D-32758 Detmold
 Germany
 Fon: +49 5231 14-0
 Fax: +49 5231 14-292083
 www.weidmueller.com

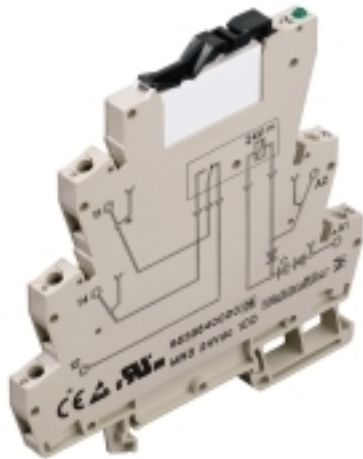

Relays of the MICROSERIES are used for isolating and coupling digital signals.

They are characterised by the following features:

- modular width 6.1 mm
- Pluggable relay
- Pluggable cross-connection for four voltages in input and output circuits,
- innovative retention and ejection aid,
- LED operating indicator, reverse polarity protection diode, free-wheeling diode

General ordering data

Type	MRS 24Vdc 1CO
Order No.	8533640000
Version	MICROSERIES, Relays, No. of contacts: 1, CO contact, AgNi, Rated control voltage: 24 V DC \pm 20 %, Continuous current: 6 A, Screw connection
GTIN (EAN)	4032248169740
Qty.	10 pc(s).

MICROSERIES MRS 24Vdc 1CO

Weidmüller Interface GmbH & Co. KG
 Klingenbergstraße 16
 D-32758 Detmold
 Germany
 Fon: +49 5231 14-0
 Fax: +49 5231 14-292083
 www.weidmueller.com

Technische Daten

Dimensions and weights

Width	6.1 mm	Height	93 mm
Depth	94 mm	Net weight	34.27 g

Temperatures

Humidity	40 °C / 93 % rel. humidity, no condensation	Operating temperature	-25 °C...+55 °C
Storage temperature	-40 °C...+60 °C		

Input

Coil resistance		Protective circuit	Integrated free-wheel diode, Reverse polarity protection
Pull-in/rop-out current, typ.	4 mA / 1.2 mA DC	Rated control voltage	24 V DC ±20 %
Rated current DC	6.6 mA	Power rating	160 mW
Pull-in/rop-out voltage, typ.	16.9 V / 6.5 V DC	Status indicator	Green LED

Output

Rated switching voltage	250 V AC	Max. switching voltage, AC	250 V
Max. switching voltage, DC	250 V	Continuous current	6 A
Inrush current	6 A	Schaltleistung AC (ohmsch), max.	1500 VA @ 250 V
Schaltleistung DC (ohmsch), max.	144 W @ 24 V	Switch-on delay	6.6 ms
Switch-off delay	5.8 ms	Min. switching power	100 mA / 5 V, 10 V / 10 mA, 24 V / 1 mA
Max. switching frequency at rated load	0.1 Hz		

Contact data

No. of contacts	1	Contact design	CO contact
Contact material	AgNi	Mechanical service life	20 x 10 ⁶ switching cycles

General data

Wire connection method	Screw connection	Humidity	40 °C / 93 % rel. humidity, no condensation
------------------------	------------------	----------	--

Insulation coordination

Creepage and clearance distance input - output	≥ 5.5 mm	Rated voltage	300 V
Dielectric strength to mounting rail	4 kV _{eff} / 1 min.	Impulse withstand voltage	4 kV (1.2/50 µs)
Protection degree	IP 20	Pollution severity	2
Surge voltage category	III		

Other technical data

Version	Relay coupler	Protective circuit	Integrated free-wheel diode, Reverse polarity protection
Status indicator	Green LED		

**MICROSERIES
MRS 24Vdc 1CO**

Weidmüller Interface GmbH & Co. KG
 Klingenbergstraße 16
 D-32758 Detmold
 Germany
 Fon: +49 5231 14-0
 Fax: +49 5231 14-292083
 www.weidmueller.com

Technische Daten

Further details of approvals / standards

Certificate No. (CSA)	LR82859	Certificate No. (cURus)	E141197
Certificate no. (cULus)	E141197	Standards	DIN EN 50178, UL508

Connection data

Clamping range, rated connection	2.5 mm ²	Clamping range, rated connection, max.	4 mm ²
Clamping range, rated connection, min.	0.5 mm ²	Wire connection method	Screw connection

Classifications

ETIM 3.0	EC001437	UNSPSC	30-21-19-17
eClass 5.1	27-37-16-01	eClass 6.2	27-37-16-01
eClass 7.1	27-37-16-01		

Product information

Descriptive text technical data	Cross-connectors and markers - refer to MICROSERIES accessories
---------------------------------	---

Approvals

Approvals



ROHS	Conform
------	---------

Downloads


Declaration of Conformity	K205_09_09.pdf
	3D Modell

**MICROSERIES
MRS 24Vdc 1CO**


Weidmüller Interface GmbH & Co. KG
 Klingenbergstraße 16
 D-32758 Detmold
 Germany
 Fon: +49 5231 14-0
 Fax: +49 5231 14-292083
 www.weidmueller.com

Zeichnungen


Electric symbol

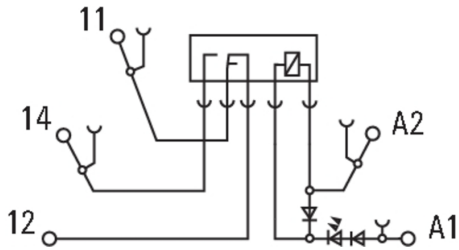

DC load breaking capacity

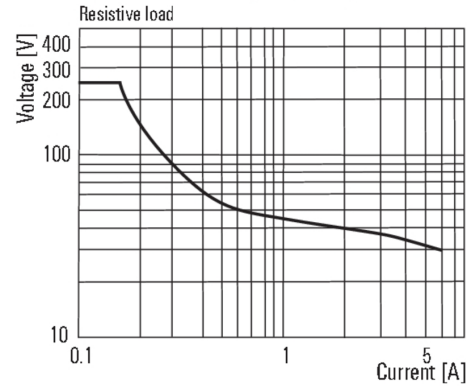

Electrical endurance
230 V AC resistive load

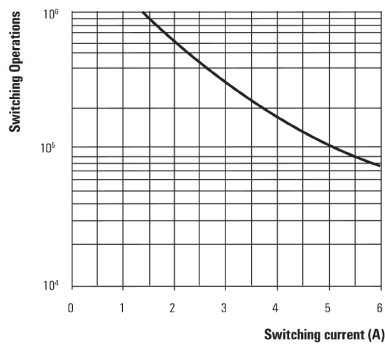

Derating curve

